


IEEE 802.11 Wireless LANs

Part I: Basics

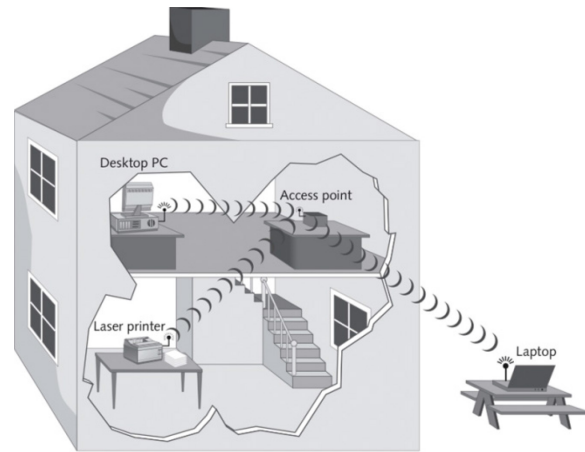

Raj Jain

Professor of Computer Science and Engineering
Washington University in Saint Louis
Saint Louis, MO 63130

Jain@cse.wustl.edu

Audio/Video recordings of this class lecture are available at:

<http://www.cse.wustl.edu/~jain/cse574-20/>

Student Questions



1. IEEE 802.11 Features
2. IEEE 802.11 Physical Layers
3. IEEE 802.11 MAC
4. IEEE 802.11 Architecture
5. Frame Format
6. Power Management

Note: This is 1st of 2 lectures on Wi-Fi. The 2nd lecture covers recent developments such as high-throughput Wi-Fi, white spaces, etc.

Student Questions


IEEE 802.11 vs. Wi-Fi

- ❑ IEEE 802.11 is a standard
- ❑ Wi-Fi = “Wireless Fidelity” is a trademark
- ❑ Fidelity = Compatibility between wireless equipment from different manufacturers
- ❑ Wi-Fi Alliance is a non-profit organization that does the compatibility testing (WiFi.org)
- ❑ 802.11 has many options and it is possible for two equipment based on 802.11 to be incompatible.
- ❑ All equipment with “Wi-Fi” logo have selected options such that they will interoperate.

Student Questions

IEEE Standards Numbering System

- ❑ IEEE 802.* and IEEE 802.1* standards (e.g., IEEE 802.1Q-2011) apply to all IEEE 802 technologies:
 - IEEE 802.3 Ethernet
 - IEEE 802.11 Wi-Fi
 - IEEE 802.16 WiMAX

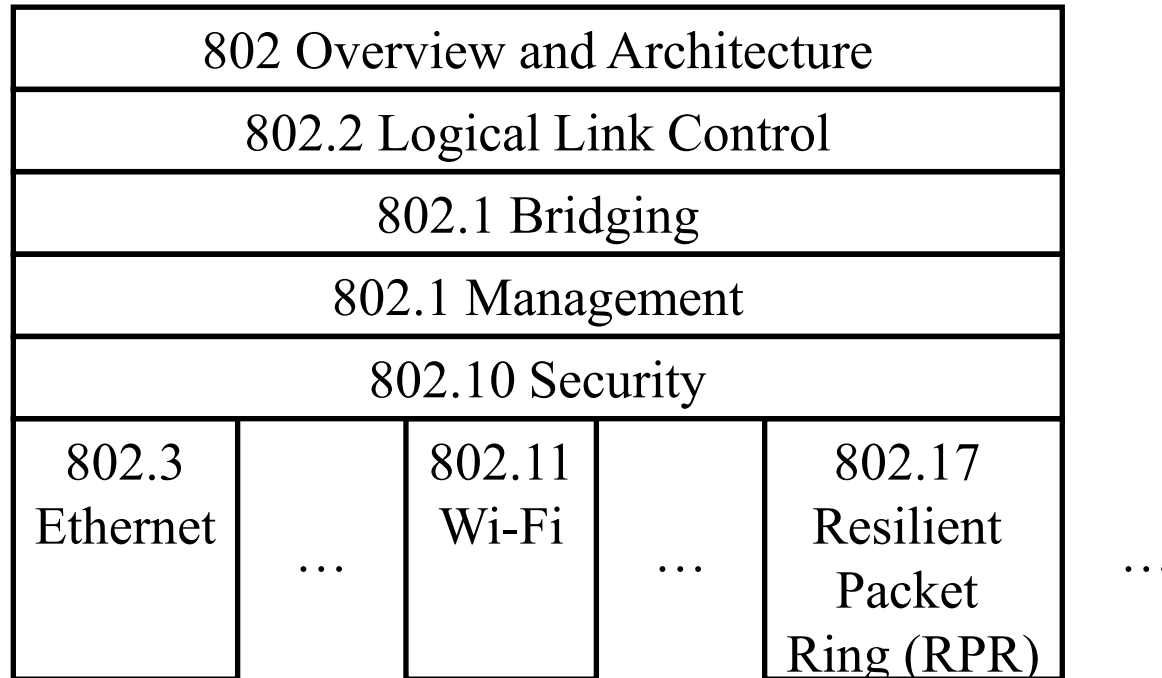

Student Questions

IEEE Standards Numbering (Cont)

- ❑ IEEE 802.11* (e.g., 802.11i) standards apply to all Wi-Fi devices but may not apply to ZigBee devices which are based on 802.15,
- ❑ Standards with all upper case letters are base standards, e.g., IEEE 802.1AB-2009
- ❑ Standards with lower case are additions/extensions/revisions. Merged with the base standard in its next revision. e.g., IEEE 802.1w-2001 was merged with IEEE 802.1D-2004
- ❑ Standards used to be numbered, sequentially, e.g., IEEE 802.1a, ..., 802.1z, 802.1aa, 802.1ab, ...
- ❑ Recently they started showing base standards in the additions, e.g., IEEE 802.1Qau-2010

Student Questions

IEEE 802.11 Features

- ❑ Original IEEE 802.11-1997 was at 1 and 2 Mbps.
Newer versions at 11 Mbps, 54 Mbps, 108 Mbps, 200 Mbps,...
- ❑ All versions use “License-exempt” spectrum
- ❑ Need ways to share spectrum among multiple users and multiple LANs P *Spread Spectrum* (CDMA)
- ❑ Three Phys:
 - Direct Sequence (**DS**) spread spectrum using ISM band
 - Frequency Hopping (**FH**) spread spectrum using ISM band
 - Diffused Infrared (850-900 nm) bands
- ❑ Supports multiple priorities
- ❑ Supports time-critical and data traffic
- ❑ Power management allows a node to doze off

Student Questions

ISM Bands

- Industrial, Scientific, and Medical bands. License exempt

| From | To | Bandwidth | Availability |
|------------------|------------------|----------------|---|
| 6.765 MHz | 6.795 MHz | 30 kHz | |
| 13.553 MHz | 13.567 MHz | 14 kHz | Worldwide |
| 26.957 MHz | 27.283 MHz | 326 kHz | Worldwide |
| 40.660 MHz | 40.700 MHz | 40 kHz | Worldwide |
| 433.050 MHz | 434.790 MHz | 1.74 MHz | Europe, Africa, Middle east, Former Soviet Union |
| 902.000 MHz | 928.000 MHz | 26 MHz | America, Greenland |
| 2.400 GHz | 2.500 GHz | 100 MHz | Worldwide |
| 5.725 GHz | 5.875 GHz | 150 MHz | Worldwide |
| 24.000 GHz | 24.250 GHz | 250 MHz | Worldwide |
| 61.000 GHz | 61.500 GHz | 500 MHz | |
| 122.000 GHz | 123.000 GHz | 1 GHz | |
| 244 GHz | 246 GHz | 2 GHz | |

Student Questions

Ref: http://en.wikipedia.org/wiki/ISM_band

Washington University in St. Louis


<http://www.cse.wustl.edu/~jain/cse574-20/>

©2020 Raj Jain


North American Channels

2.4 GHz Band: 14 5-MHz Channels. Only 12 in USA.

20 MHz \Rightarrow Only 3 non-overlapping channels

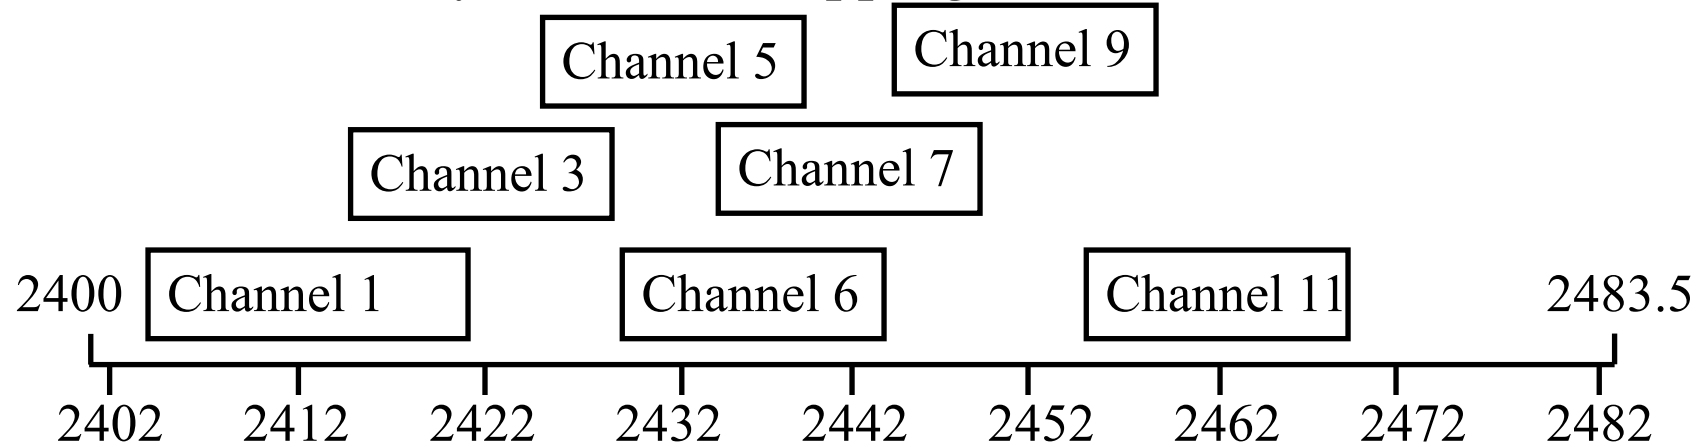

5 GHz Band: 12 non-overlapping channels

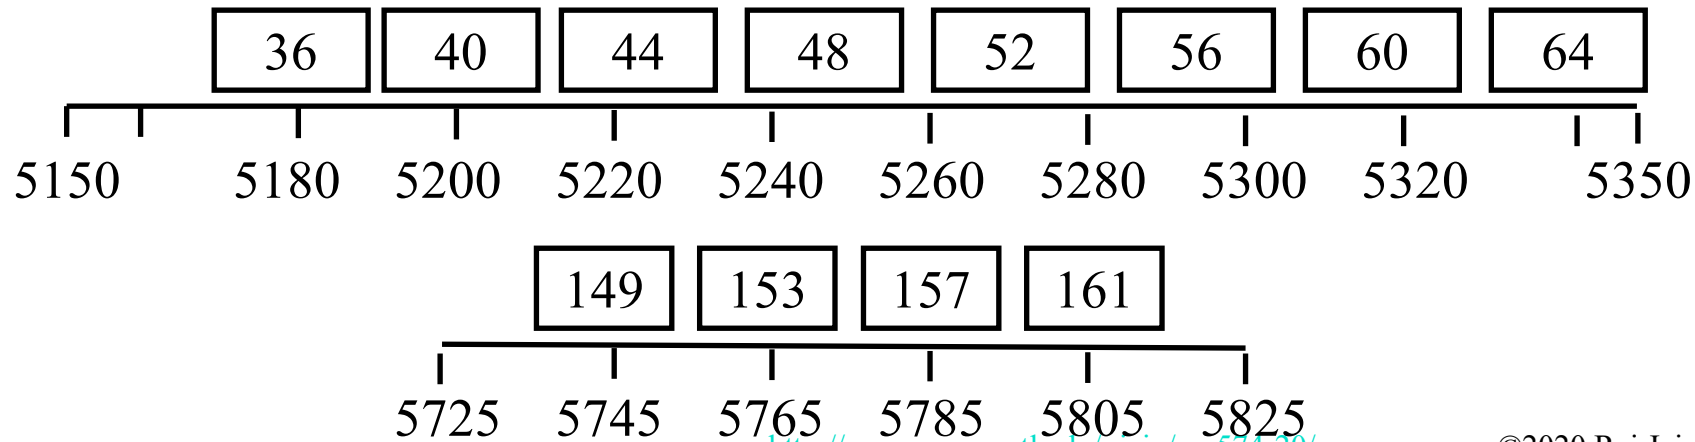


Student Questions

IEEE 802.11 Physical Layers

- ❑ Issued in several stages
- ❑ First version in 1997: IEEE 802.11
 - Includes MAC layer and three physical layer specifications
 - Two in 2.4-GHz band and one infrared
 - All operating at 1 and 2 Mbps
 - No longer used
- ❑ Two additional amendments in 1999:
 - IEEE 802.11a-1999: 5-GHz band, 54 Mbps/20 MHz, **OFDM**
 - IEEE 802.11b-1999: 2.4 GHz band, 11 Mbps/22 MHz
- ❑ Fourth amendment:
 - IEEE 802.11g-2003 : 2.4 GHz band, 54 Mbps/20 MHz, **OFDM**

Student Questions


Hidden Node Problem

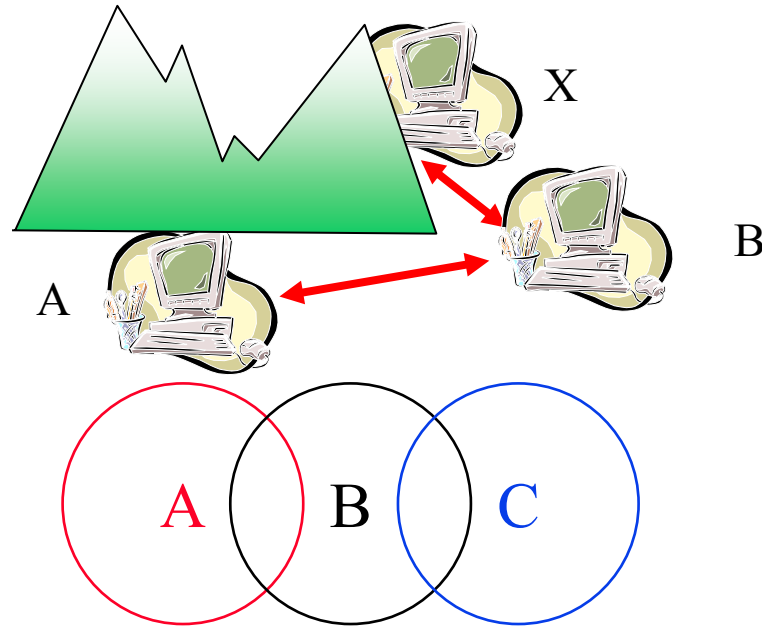

- ❑ A can hear B, B can hear C, but C cannot hear A.
- ❑ C may start transmitting while A is also transmitting
⇒ A and C can't detect collision.
- ❑ CSMA/CD is not possible
⇒ Only the receiver can help avoid collisions

Student Questions

4-Way Handshake

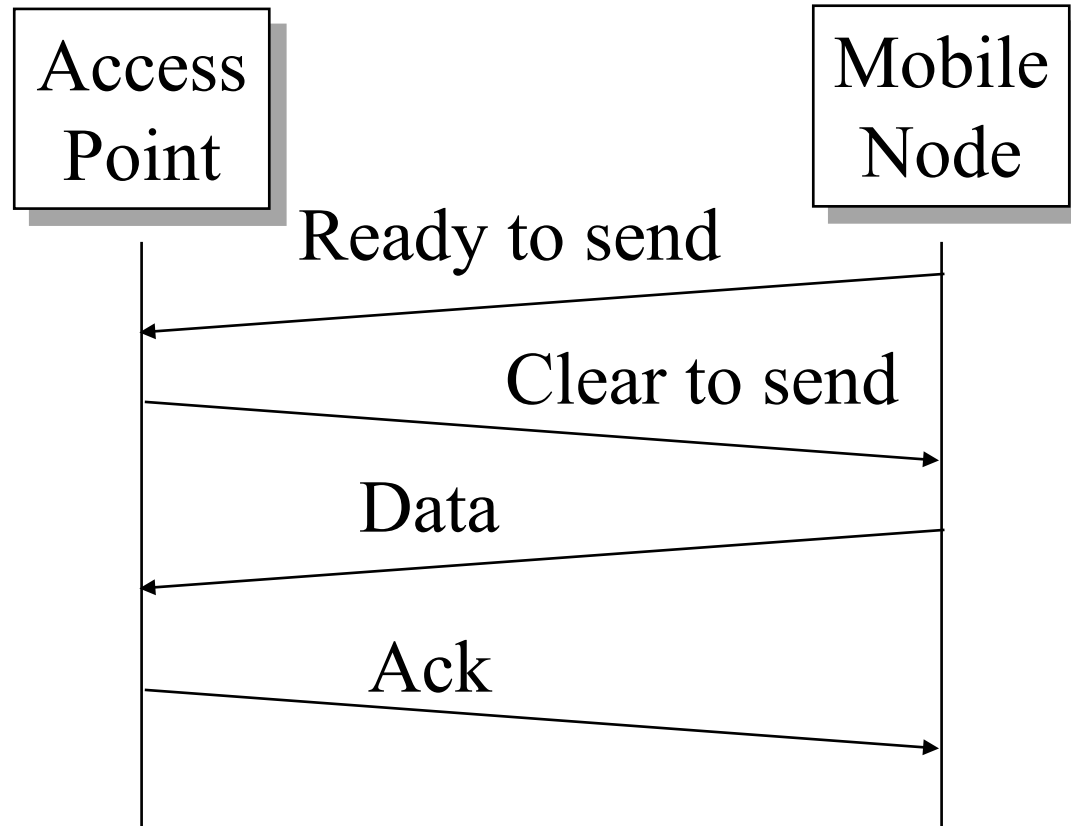


Student Questions

IEEE 802.11 MAC

- ❑ Carrier Sense Multiple Access with Collision Avoidance (**CSMA/CA**)
- ❑ Listen before you talk. If the medium is busy, the transmitter backs off for a random period.
- ❑ Avoids collision by sending a short message:
Ready to send (**RTS**)
RTS contains dest. address and duration of message.
Tells everyone to backoff for the duration.
- ❑ Destination sends: Clear to send (**CTS**)
Other stations set their network allocation vector (**NAV**) and wait for that duration
- ❑ Can not detect collision \Rightarrow Each packet is acked.
- ❑ MAC-level retransmission if not acked.

Student Questions


IEEE 802.11 Priorities

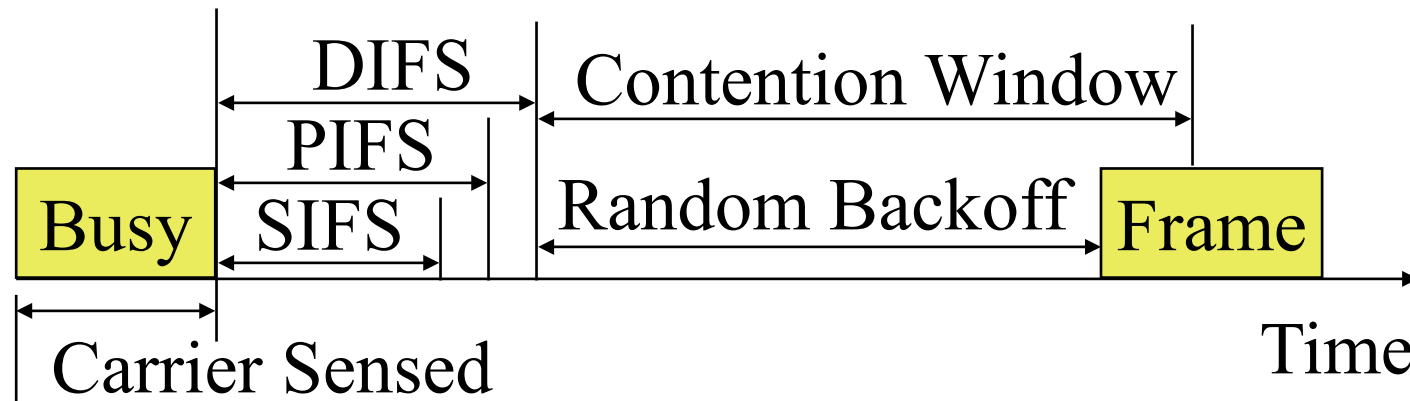

- ❑ Initial interframe space (**IFS**)
- ❑ Highest priority frames, e.g., Acks, use short IFS (**SIFS**)
- ❑ Medium priority time-critical frames use “Point Coordination Function IFS” (**PIFS**)
- ❑ Asynchronous data frames use “Distributed coordination function IFS” (**DIFS**)

Student Questions

Time Critical Services

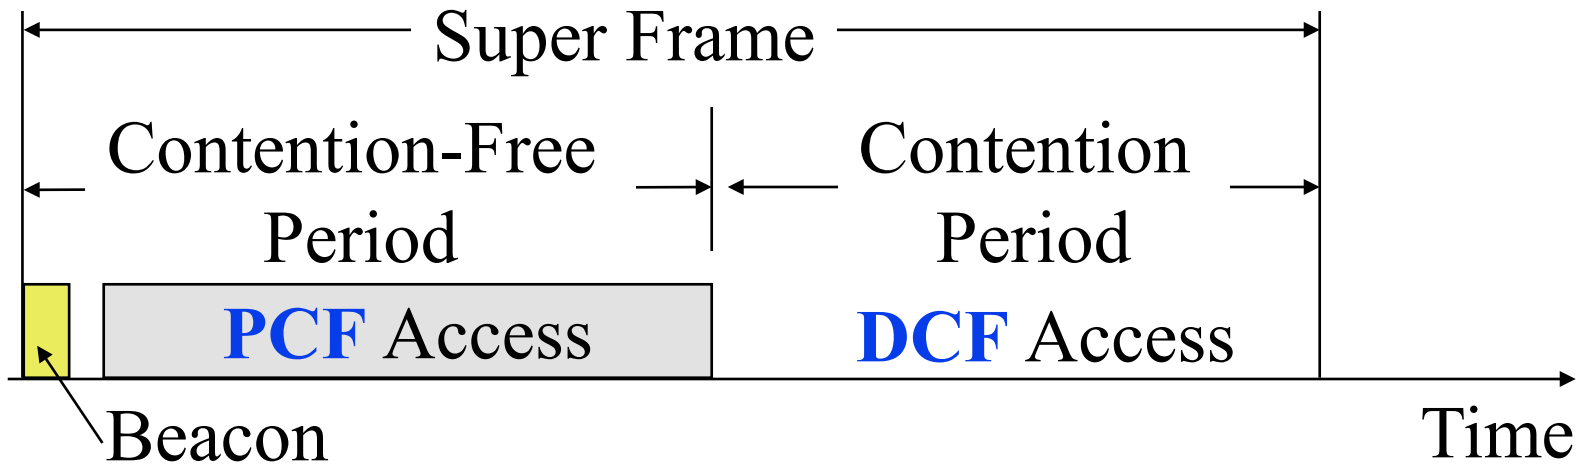

- ❑ Timer critical services use **Point Coordination Function**
- ❑ The point coordinator allows only one station to access
- ❑ Coordinator sends a beacon frame to all stations.
Then uses a polling frame to allow a particular station to have contention-free access
- ❑ Contention Free Period (CFP) varies with the load.

Student Questions

IEEE 802.11 DCF Backoff

- ❑ MAC works with a single FIFO Queue
- ❑ Three variables:
 - Contention Window (CW)
 - Backoff count (BO)
 - Network Allocation Vector (NAV)
- ❑ If a frame (RTS, CTS, Data, Ack) is heard, NAV is set to the duration in that frame. Stations sense the media after NAV expires.
- ❑ If the medium is idle for DIFS, and backoff (BO) is not already active, the station draws a random BO in $[0, CW]$ and sets the backoff timer.
- ❑ If the medium becomes busy during backoff, the timer is stopped and a new NAV is set. After NAV, back off continues.

Student Questions

IEEE 802.11 DCF Backoff (Cont)

- Initially and after each successful transmission:

$$CW = CW_{\min}$$

- After each unsuccessful attempt

$$CW = \min\{2CW + 1, CW_{\max}\}$$

Example: $CW_{\min}=3$, $CW_{\max}=127$

3, 7, 15, 31, 63, 127, 127, 127, ...

Student Questions

Typical Parameter Values

- ❑ For DS PHY: Slot time = 20 μ s, SIFS = 10 μ s, CWmin = 31, CWmax = 1023
- ❑ For FH PHY: Slot time = 50 μ s, SIFS = 28 μ s, CWmin = 15, CWmax = 1023
- ❑ 11a: Slot time = 9 μ s, SIFS = 16 μ s, CWmin = 15, CWmax = 1023
- ❑ 11b: Slot time = 20 μ s, SIFS = 10 μ s, CWmin = 31, CWmax = 1023
- ❑ 11g: Slot time = 20 μ s or 9 μ s, SIFS = 10 μ s, CWmin = 15 or 31, CWmax = 1023
- ❑ PIFS = SIFS + 1 slot time
- ❑ DIFS = SIFS + 2 slot times

Student Questions


Virtual Carrier Sense

- ❑ Every frame has a “Duration ID” which indicates how long the medium will be busy.
 - RTS has duration of $\text{RTS} + \text{SIF} + \text{CTS} + \text{SIF} + \text{Frame} + \text{SIF} + \text{Ack}$
 - CTS has duration of $\text{CTS} + \text{SIF} + \text{Frame} + \text{SIF} + \text{Ack}$
 - Frame has a duration of $\text{Frame} + \text{SIF} + \text{ACK}$
 - ACK has a duration of ACK
- ❑ All stations keep a “**Network Allocation Vector (NAV)**” timer in which they record the duration of the each frame they hear.
- ❑ Stations do not need to sense the channel until NAV becomes zero.

Student Questions

DCF Example


- ❑ Example: Slot Time = 1, CWmin = 5, DIFS=3, PIFS=2, SIFS=1
- ❑ T=1 Station 2 wants to transmit but the media is busy
- ❑ T=2 Stations 3 and 4 want to transmit but the media is busy
- ❑ T=3 Station 1 finishes transmission.
- ❑ T=4 Station 1 receives ack for its transmission (SIFS=1)
Stations 2, 3, 4 set their NAV to 1.
- ❑ T=5 Medium becomes free
- ❑ T=8 DIFS expires. Stations 2, 3, 4 draw backoff count between 0 and 5.
The counts are 3, 1, 2

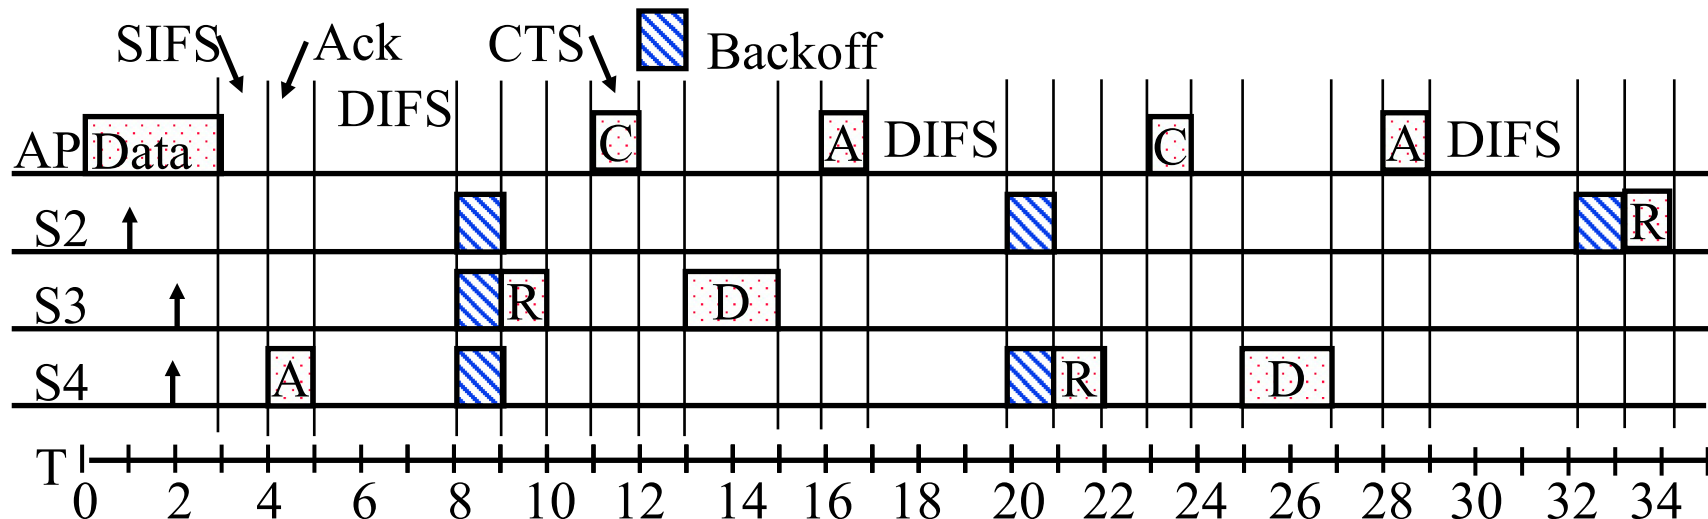

Student Questions


DCF Example (Cont)

- T=9 Station 3 starts transmitting. Announces a duration of 8 (RTS + SIFS + CTS + SIFS + DATA + SIFS + ACK). Station 2 and 4 pause backoff counter at 2 and 1 resp. and wait till T=17
- T=15 Station 3 finishes data transmission
- T=16 Station 3 receives Ack.
- T=17 Medium becomes free
- T=20 DIFS expires. Station 2 and 4 notice that there was no transmission for DIFS. Stations 2 and 4 start their backoff counter from 2 and 1, respectively.
- T=21 Station 4 starts transmitting RTS

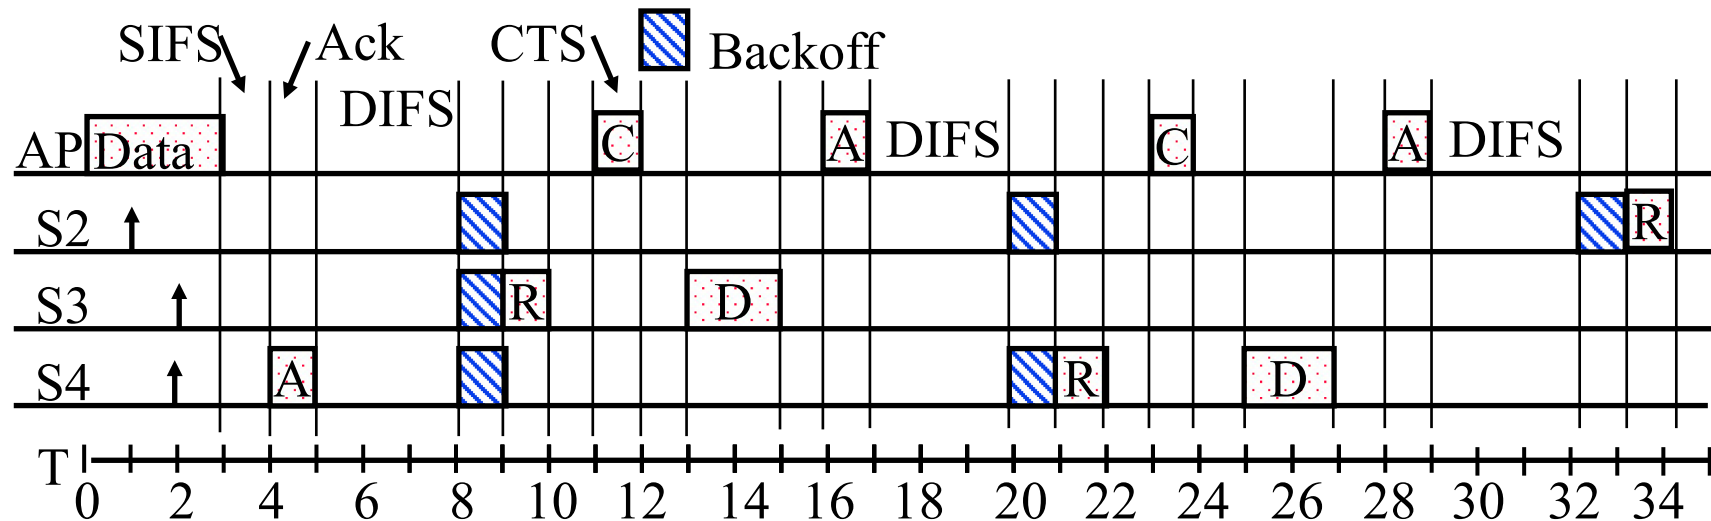

Student Questions

IEEE 802.11 Architecture

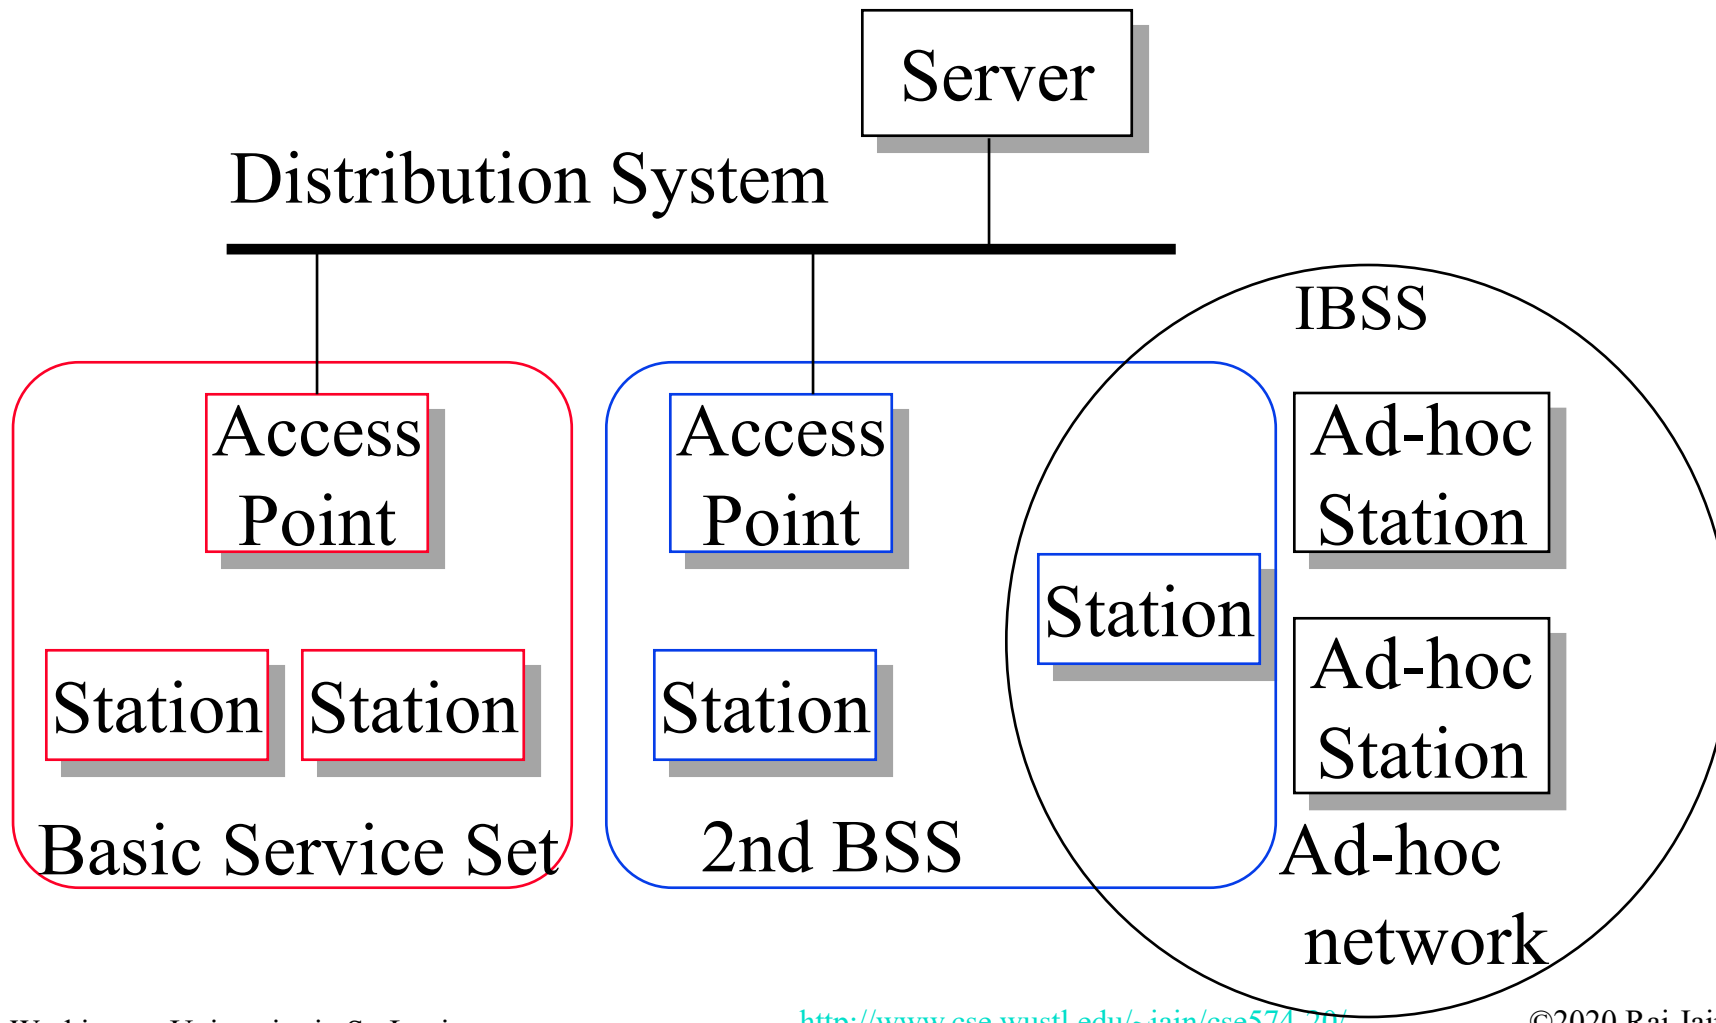


Student Questions

IEEE 802.11 Architecture (Cont)

- ❑ **Basic Service Area (BSA)** = Cell
- ❑ Each BSA may have several access points (APs)
- ❑ **Basic Service Set (BSS)**
= Set of stations associated with one AP
- ❑ **Distribution System (DS)** - wired backbone
- ❑ **Extended Service Area (ESA)** = Multiple BSAs interconnected via a distribution system
- ❑ **Extended Service Set (ESS)**
= Set of stations in an ESA
- ❑ **Independent Basic Service Set (IBSS)**: Set of computers in **ad-hoc mode**. May not be connected to wired backbone.
- ❑ Ad-hoc networks coexist and interoperate with infrastructure-based networks

Student Questions

Frame Format

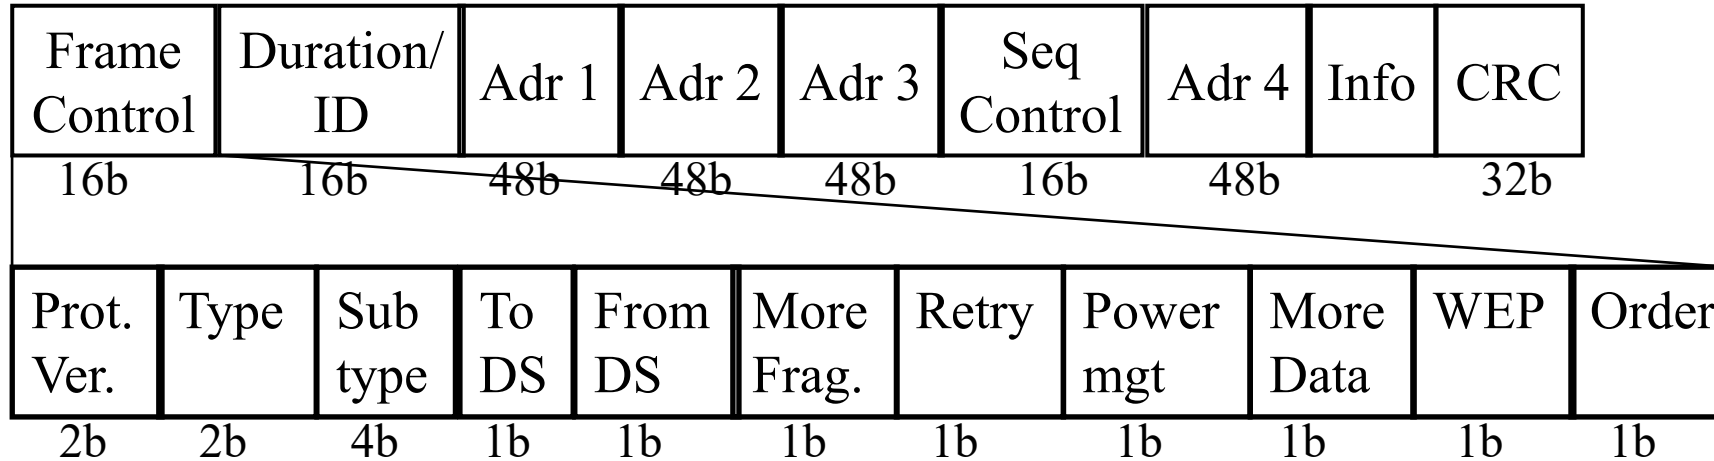

- ❑ Type: Control, management, or data
- ❑ Sub-Type: Association, disassociation, re-association, probe, authentication, de-authentication, CTS, RTS, Ack, ...
- ❑ Retry/retransmission
- ❑ Going to Power Save mode
- ❑ More buffered data at AP for a station in power save mode
- ❑ Wireless Equivalent Privacy (Security) info in this frame
- ❑ Strict ordering

Student Questions

MAC Frame Fields

❑ Duration/Connection ID:

- If used as duration field, indicates time (in μs) channel will be allocated for successful transmission of MAC frame. Includes time until the end of Ack
- In some control frames, contains association or connection identifier


❑ Sequence Control:

- 4-bit fragment number subfield
 - ❑ For fragmentation and reassembly
- 12-bit sequence number
- Number frames between given transmitter and receiver

Student Questions

802.11 Frame Address Fields


- All stations filter on “Address 1”

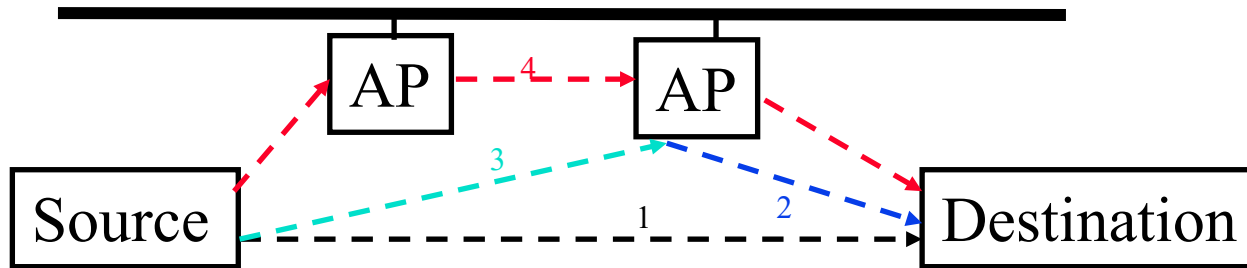

| | To Distribution System | From Distribution System | Address 1 | Address 2 | Address 3 | Address 4 |
|---|------------------------|--------------------------|---------------------|---------------------|---------------------|----------------|
| 1 | 0 | 0 | Destination Address | Source Address | BSS ID | - |
| 2 | 0 | 1 | Destination Address | BSS ID | Source Address | - |
| 3 | 1 | 0 | BSS ID | Source Address | Destination Address | - |
| 4 | 1 | 1 | Receiver Address | Transmitter Address | Destination Address | Source Address |

Student Questions


802.11 Power Management

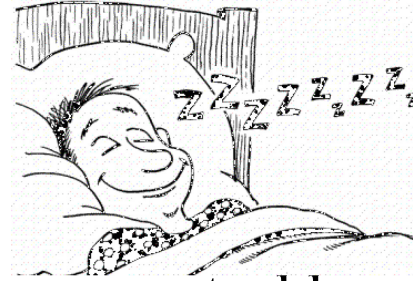

- ❑ Station tells the base station its mode:
Power saving (PS) or active
- ❑ Mode changed by power mgmt bit in the frame control header.
- ❑ All packets destined to stations in PS mode are buffered
- ❑ AP broadcasts list of stations with buffered packets in its beacon frames: Traffic Indication Map (TIM)
- ❑ Subscriber Station (SS) sends a PS-Poll message to AP, which sends one frame. More bit in the header \Rightarrow more frames.
- ❑ With 802.11e unscheduled Automatic Power Save Delivery (APSD): SS transmits a data or null frame with power saving bit set to 0. AP transmits all buffered frames for SS.
- ❑ With Scheduled APSD mode: AP will transmit at pre-negotiated time schedule. No need for polling.
- ❑ Hybrid APSD mode: PS-poll for some. Scheduled for other categories

Student Questions

Summary

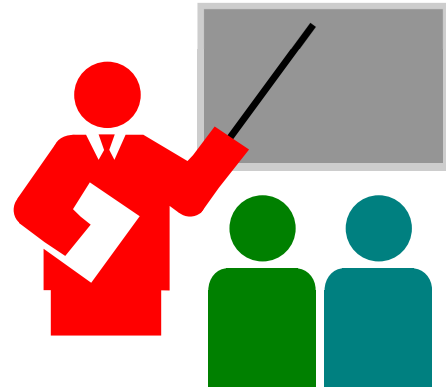

1. 802.11 uses Frequency hopping, Direct Sequence CDMA, OFDM
2. 802.11 PHYs: 802.11, 802.11a, 802.11b, 802.11g
3. Allows both: Ad-Hoc vs. Infrastructure-based
4. 802.11 supports single FIFO Q. Uses SIFS, PIFS, DIFS

Student Questions

Homework 5

- ❑ Two 802.11 stations get frames to transmit at time $t=0$. The 3rd station (AP) has just finished transmitting data for a long packet at $t=0$ to Station 1. The transmission parameters are: Slot time=1, SIFS=1, DIFS=3, CWmin=5, CWmax=7. Assume that the pseudo-random number generated are 1, 3. The **data** size for both stations is 3 slots. Draw a transmission diagram. At what time the two packets will get acknowledged assuming no new arrivals.

Student Questions

Reading List

- ❑ IEEE 802.11 Tutorial,
<https://ptolemy.berkeley.edu/projects/ofdm/ergen/docs/ieee.pdf>
- ❑ A Technical Tutorial on the IEEE 802.11 Protocol,
http://www.sss-mag.com/pdf/802_11tut.pdf

Student Questions

Wikipedia Links

- ❑ http://en.wikipedia.org/wiki/Wireless_LAN
- ❑ http://en.wikipedia.org/wiki/IEEE_802.11
- ❑ http://en.wikipedia.org/wiki/Channel_access_method
- ❑ http://en.wikipedia.org/wiki/Direct-sequence_spread_spectrum
- ❑ <http://en.wikipedia.org/wiki/Wi-Fi>
- ❑ http://en.wikipedia.org/wiki/Distributed_Coordination_Function
- ❑ http://en.wikipedia.org/wiki/Carrier_sense_multiple_access
- ❑ http://en.wikipedia.org/wiki/Multiple_Access_with_Collision_Avoidance_f_or_Wireless
- ❑ http://en.wikipedia.org/wiki/Beacon_frame
- ❑ http://en.wikipedia.org/wiki/IEEE_802.11
- ❑ [http://en.wikipedia.org/wiki/IEEE_802.11_\(legacy_mode\)](http://en.wikipedia.org/wiki/IEEE_802.11_(legacy_mode))
- ❑ http://en.wikipedia.org/wiki/IEEE_802.11_RTS/CTS
- ❑ http://en.wikipedia.org/wiki/List_of_WLAN_channels
- ❑ http://en.wikipedia.org/wiki/Point_Coordination_Function
- ❑ [http://en.wikipedia.org/wiki/Service_set_\(802.11_network\)](http://en.wikipedia.org/wiki/Service_set_(802.11_network))
- ❑ http://en.wikipedia.org/wiki/Wi-Fi_Alliance

Student Questions

Acronyms

- ❑ Ack Acknowledgement
- ❑ AP Access Point
- ❑ APSD Automatic Power Save Delivery
- ❑ BO Backoff
- ❑ BSA Basic Service Area
- ❑ BSS Basic Service Set
- ❑ BSSID Basic Service Set Identifier
- ❑ CA Collision Avoidance
- ❑ CD Collision Detection
- ❑ CDMA Code Division Multiple Access
- ❑ CFP Contention Free Period
- ❑ CRC Cyclic Redundancy Check
- ❑ CSMA Carrier Sense Multiple Access
- ❑ CTS Clear to Send
- ❑ CW Congestion Window
- ❑ CWmax Maximum Congestion Window

Student Questions

Acronyms (Cont)

- ❑ CWmin Minimum Congestion Window
- ❑ DA Destination Address
- ❑ DCF Distributed Coordination Function
- ❑ DIFS DCF Inter-frame Spacing
- ❑ DS Direct Sequence
- ❑ ESA Extended Service Area
- ❑ ESS Extended Service Set
- ❑ FH Frequency Hopping
- ❑ FIFO First In First Out
- ❑ GHz Giga Hertz
- ❑ IBSS Independent Basic Service Set
- ❑ ID Identifier
- ❑ IEEE Institution of Electrical and Electronics Engineers
- ❑ IFS Inter-frame spacing
- ❑ ISM Instrumentation, Scientific and Medical
- ❑ LAN Local Area Network

Student Questions

Acronyms (Cont)

- ❑ MAC Media Access Control
- ❑ MHz Mega Hertz
- ❑ MIMO Multiple Input Multiple Output
- ❑ NAV Network Allocation Vector
- ❑ OFDM Orthogonal Frequency Division Multiplexing
- ❑ PCF Point Coordination Function
- ❑ PHY Physical Layer
- ❑ PIFS PCF inter-frame spacing
- ❑ PS Power saving
- ❑ RA Receiver Address
- ❑ RPR Resilient Packet Ring
- ❑ RTS Ready to Send
- ❑ SA Source Address
- ❑ SIFS Short Inter-frame Spacing

Student Questions

Acronyms (Cont)

- ❑ SS Subscriber Station
- ❑ TA Transmitter's Address
- ❑ TIM Traffic Indication Map
- ❑ WEP Wired Equivalent Privacy
- ❑ Wi-Fi Wireless Fidelity
- ❑ WLAN Wireless Local Area Network

Student Questions

Scan This to Download These Slides



Raj Jain

<http://rajjain.com>

Student Questions

http://www.cse.wustl.edu/~jain/cse574-20/j_05lan.htm

Related Modules



CSE567M: Computer Systems Analysis (Spring 2013),
https://www.youtube.com/playlist?list=PLjGG94etKypJEKjNAa1n_1X0bWWNyZcof

CSE473S: Introduction to Computer Networks (Fall 2011),
https://www.youtube.com/playlist?list=PLjGG94etKypJWOSPMh8Azcg5e_10TiDw



Recent Advances in Networking (Spring 2013),
<https://www.youtube.com/playlist?list=PLjGG94etKypLHyBN8mOgwJLHD2FFIMGq5>

CSE571S: Network Security (Fall 2011),
<https://www.youtube.com/playlist?list=PLjGG94etKypKvzfVtutHcPFJXumyyg93u>



Video Podcasts of Prof. Raj Jain's Lectures,
<https://www.youtube.com/channel/UCN4-5wzNP9-ruOzQMs-8NUw>

Student Questions