

Transport Layer: TCP and UDP

Raj Jain

Washington University in Saint Louis
Saint Louis, MO 63130

jain@wustl.edu

Audio/Video recordings of this lecture are available on-line at:

<http://www.cse.wustl.edu/~jain/cse473-16/>

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-1



Transport Layer Design Issues

1. Transport Layer Functions
2. Multiplexing and Demultiplexing
3. Error Detection: Checksum
4. Flow Control
5. Efficiency Principle
6. Error Control: Retransmissions

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-3




- Transport Layer Design Issues:
 - Multiplexing/Demultiplexing
 - Reliable Data Transfer
 - Flow control
 - Congestion control
- UDP
- TCP
 - Header format, connection management, checksum
 - Congestion Control
- **Note:** This class lecture is based on Chapter 3 of the textbook (Kurose and Ross) and the figures provided by the authors.

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-2

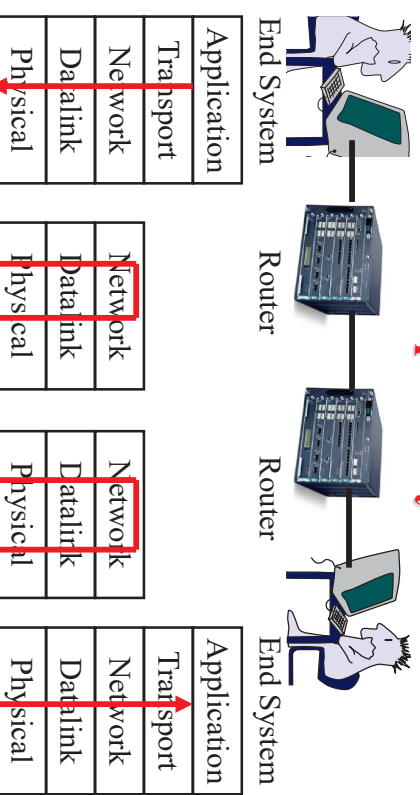

- Transport = End-to-End Services
- Services required at source and destination systems
- Not required on intermediate hops

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-4

Transport Layer Functions

1. **Multiplexing and demultiplexing:** Among applications and processes at end systems
 2. **Error detection:** Bit errors
 3. **Loss detection:** Lost packets due to buffer overflow at intermediate systems (Sequence numbers and acks)
 4. **Error/loss recovery:** Retransmissions
 5. **Flow control:** Ensuring receiver has buffers
 6. **Congestion Control:** Ensuring network has capacity
- Not all transports provide all functions

Washington University in St. Louis


<http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jan

3-5

Multiplexing and Demultiplexing

- Transport **Ports** and **Network addresses** are used to separate flows

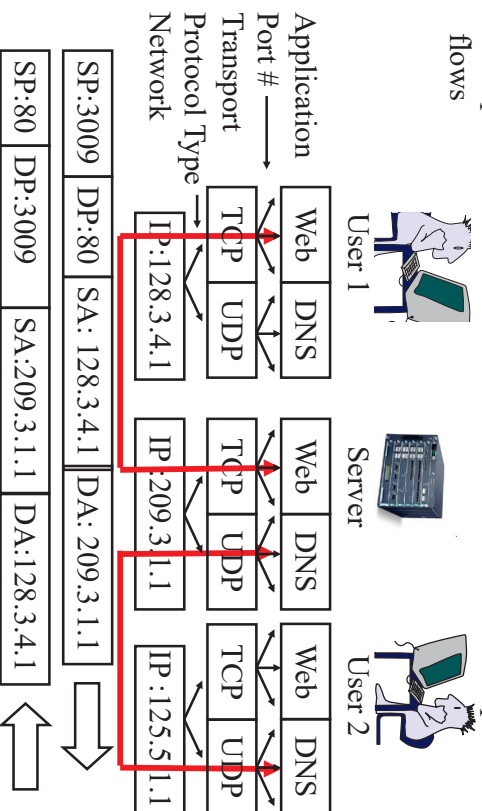

Ref: http://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers
Washington University in St. Louis <http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jan

3-7

Protocol Layers

- Top-Down approach

Application	HTTP	FTP	SMTP	P2P	DNS	Skype
Transport	TCP			UDP		
Internetwork	IP					
Host to Network	Ethernet		Point-to-Point		Wi-Fi	
Physical	Coax		Fiber		Wireless	

Washington University in St. Louis


<http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jan

3-6

User Datagram Protocol (UDP)

- Connectionless end-to-end service
- Provides multiplexing via ports
- Error detection (Checksum) optional. Applies to **pseudo-header** (same as TCP) and UDP segment. If not used, it is set to zero.
- No error recovery (no acks). No retransmissions.
- Used by network management, DNS, Streamed multimedia (Applications that are loss tolerant, delay sensitive, or have their own reliability mechanisms)



Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jan

3-8

Error Detection: Checksum

- Cyclic Redundancy Check (CRC):** Powerful but generally requires hardware
- Checksum:** Weak but easily done in software
 - Example:** 1's complement of 1's complement sum of 16-bit words with overflow wrapped around

```
1 1 1 0 0 1 1 0 0 1 1 0 0 1 1 0
1 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1
```

wrapparound 1 1 0 1 1 1 0 1 1 1 0 1 1 1 0 1 1

```
sum      1 0 1 1 1 0 1 1 1 0 1 1 1 1 0 0
checksum 0 1 0 0 0 1 0 0 0 1 0 0 0 0 1 1
```

At receiver the sum is all 1's and the checksum is zero.

1's Complement

- 2's Complement:** -ve of a number is complement+1
 - 1 = 0001 -1 = 1111
 - 2 = 0010 -2 = 1110
 - 0 = 0000 -0 = 0000
- 1's complement:** -ve of a number is it's complement
 - 1 = 0001 -1 = 1110
 - 2 = 0010 -2 = 1101
 - 0 = 0000 -0 = 1111

2's Complement sum: Add with carry. Drop the final carry, if any.
 $6-7 = 0110 + (-0111) = 0110 + 1001 = 1111 \Rightarrow -1$

1's complement sum: Add with carry. Add end-around carry back to sum
 $6-7 = 0110 + (-0111) = 0110 + 1000 = 1110 \Rightarrow -1$

Complement of 1's complement sum: 0001

Checksum: At the transmitter: 0110 1000, append 0001

At the receiver: 0110 1000 0001 compute checksum of the full packet
= complement of sum = complement of 1111 = 0000

Homework 3A

Consider the following two 16-bit words: ABCD 1234

- What is the checksum as computed by the sender
- Add your answer of Part A to the end of the packet and show how the receiver will compute the checksum of the received three 16-bit words and confirm that there are no errors.
- Now assume that the first bit of the packet is flipped due to an error. Repeat Part B at the receiver. Is the error detected?



UDP: Summary

- UDP provides flow multiplexing using port #s
- UDP optionally provides error detection using the checksum
- UDP does not have error or loss recovery mechanism

Lab 3A: UDP

- Download the wireshark traces from <http://gata.cs.umass.edu/wireshark-labs/wireshark-traces.zip>
- Open the trace file http-ethereal-trace-5 in Wireshark. View → Expand All and answer the following questions?
 1. Examine the first packet. In the printout for this packet, select the line with UDP. The UPD header is highlighted in the trace. How many fields are there in the UDP header? Name these fields, their lengths and their values.
 2. The value in the Length field is the length of what? Verify your claim with your captured UDP packet.
 3. What is the maximum number of bytes that can be included in a UDP payload?
 4. What is the largest possible source port number?
 5. Examine the first two UDP packets. Describe the relationship between the port numbers in the two packets.

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-13




Flow Control

- Flow Control Goals:


1. Sender does not flood the receiver,
2. Maximize throughput

Stop and Wait Flow Control

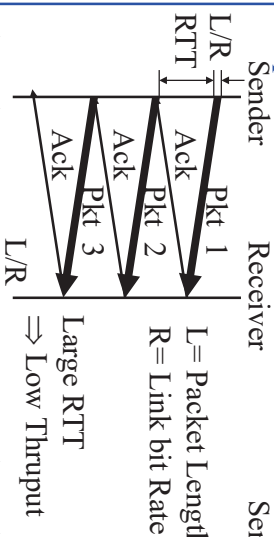

$$\text{Throughput} = \frac{L/R}{RTT+L/R}$$

Window Flow Control



$$\text{Throughput} = \frac{W/L/R}{RTT+L/R}$$


Ref: textbook Section 3.4.2
Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-14

Sliding Window Diagram

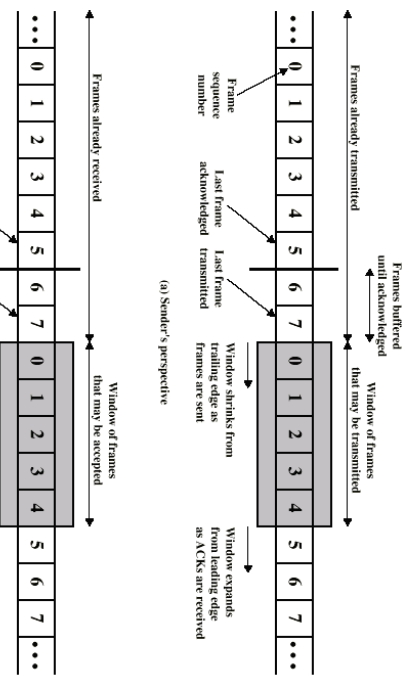


Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-15

Stop and Wait Flow Control

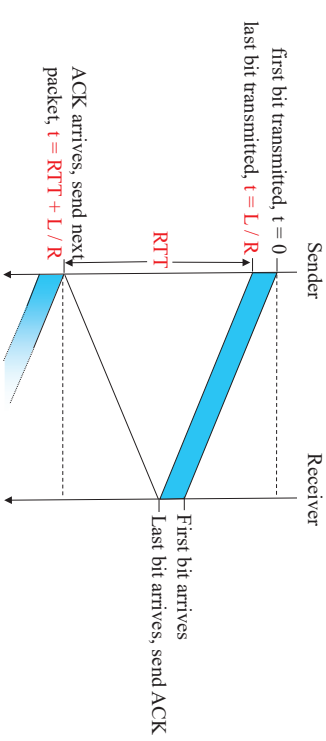

$$U = \frac{L/R}{RTT + L/R} = \frac{t_{\text{frame}}}{2t_{\text{prop}} + t_{\text{frame}}} = \frac{1}{2\alpha + 1}$$

Washington University in St. Louis


<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-16

Here, $\alpha = t_{\text{prop}}/t_{\text{frame}}$

Sliding Window Protocol Efficiency

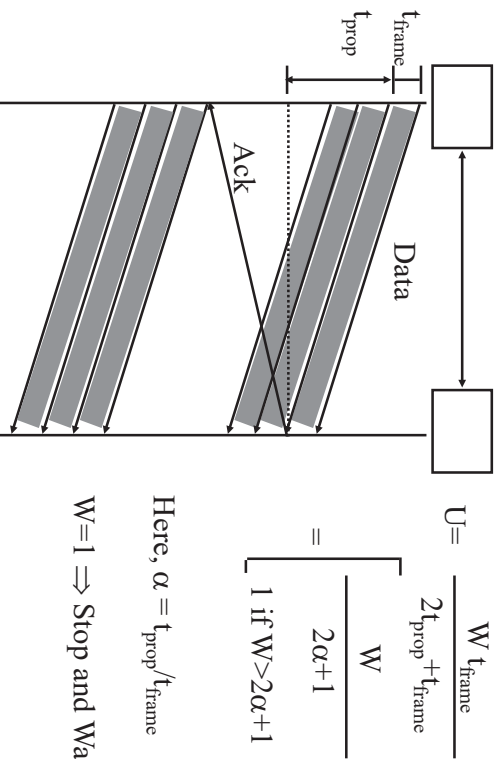

$$U = \frac{W t_{\text{frame}}}{2t_{\text{prop}} + t_{\text{frame}}}$$

$$= \begin{cases} \frac{W}{2\alpha + 1} \\ 1 \text{ if } W > 2\alpha + 1 \end{cases}$$

Here, $\alpha = t_{\text{prop}}/t_{\text{frame}}$

$W=1 \Rightarrow$ Stop and Wait

Utilization: Examples

Satellite Link: One-way Propagation Delay = 270 ms

RTT=540 ms

Frame Size $L = 500$ Bytes = 4 kb

Data rate $R = 56$ kbps $\Rightarrow t_{\text{frame}} = L/R = 4\text{kb}/56\text{kbps} = 0.071\text{s} = 71$ ms

$\alpha = t_{\text{prop}}/t_{\text{frame}} = 270/71 = 3.8$

$U = 1/(2\alpha + 1) = 0.12$


Short Link: 1 km = 5 μs (Assuming Fiber 200 m/ μs),
Rate=10 Mbps,

Frame=500 bytes $\Rightarrow t_{\text{frame}} = 4\text{k}/10\text{M} = 400 \mu\text{s}$

$\alpha = t_{\text{prop}}/t_{\text{frame}} = 5/400 = 0.012 \Rightarrow U = 1/(2\alpha + 1) = 0.98$

Note: The textbook uses RTT in place of t_{prop} and L/R for t_{frame}


Effect of Window Size

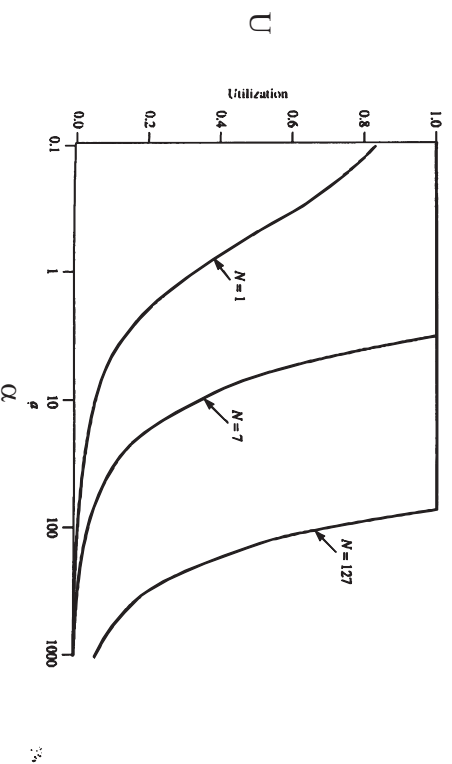

□ Larger window is better for larger α

Efficiency Principle

□ For all protocols, the maximum utilization (efficiency) is a *non-increasing* function of α .

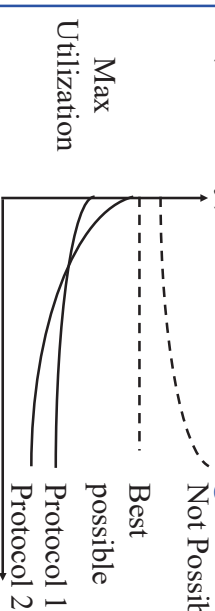


$$\alpha = \frac{t_{\text{prop}}}{t_{\text{frame}}} = \frac{\text{Distance/Speed of Signal}}{\text{Bits Transmitted /Bit rate}}$$

$$= \frac{\text{Distance} \times \text{Bit rate}}{\text{Bits Transmitted} \times \text{Speed of Signal}}$$

Error Control: Retransmissions


- Retransmit lost packets \Rightarrow Automatic Repeat reQuest (ARQ)

Stop and Wait ARQ

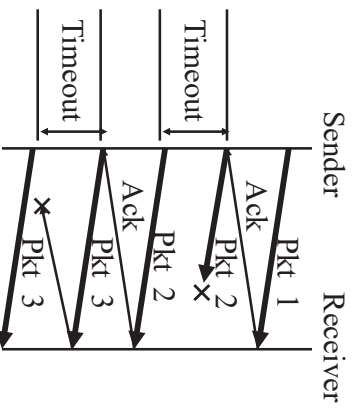


Go-Back-N ARQ

- Receiver does not cache out-of-order frames
- Sender has to *go back* and retransmit all frames after the lost frame

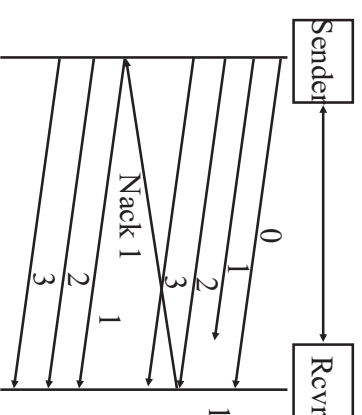


Selective Repeat ARQ

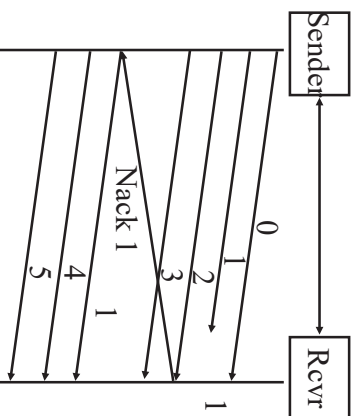

- Receiver caches out-of-order frames
- Sender retransmits only the lost frame
- Also known as selective *reject* ARQ

Selective Repeat: Window Size

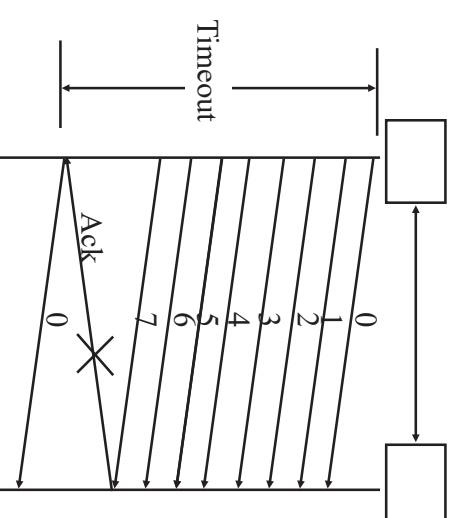

- Sequence number space ≥ 2 window size
- Window size $\leq 2^{n-1}$

Performance: Maximum Utilization

□ Stop and Wait Flow Control: $U = 1/(1+2\alpha)$

□ Window Flow Control:

$$U = \begin{cases} 1 & W \geq 2\alpha + 1 \\ W/(2\alpha + 1) & W < 2\alpha + 1 \end{cases}$$

□ Stop and Wait ARQ: $U = (1-P)/(1+2\alpha)$

□ Go-back-N ARQ: $P = \text{Probability of Loss}$

$$U = \begin{cases} (1-P)/(1+2\alpha P) & W \geq 2\alpha + 1 \\ W(1-P)/[(2\alpha + 1)(1-P + WP)] & W < 2\alpha + 1 \end{cases}$$

□ Selective Repeat ARQ:

$$U = \begin{cases} (1-P) & W \geq 2\alpha + 1 \\ W(1-P)/(2\alpha + 1) & W < 2\alpha + 1 \end{cases}$$

Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cs473.16/>

©2016 Raj Jain

3-25



Transport Layer Design Issues

1. Multiplexing/demultiplexing by a combination of source and destination IP addresses and port numbers.
2. Window flow control is better for long-distance or high-speed networks
3. Longer distance or higher speed
 \Rightarrow Larger $\alpha \Rightarrow$ Larger window is better
4. Stop and and wait flow control is ok for short distance or low-speed networks
5. Selective repeat is better than stop and wait ARQ
 Only slightly better than go-back-N


Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cs473.16/>

©2016 Raj Jain

3-27

Performance Comparison

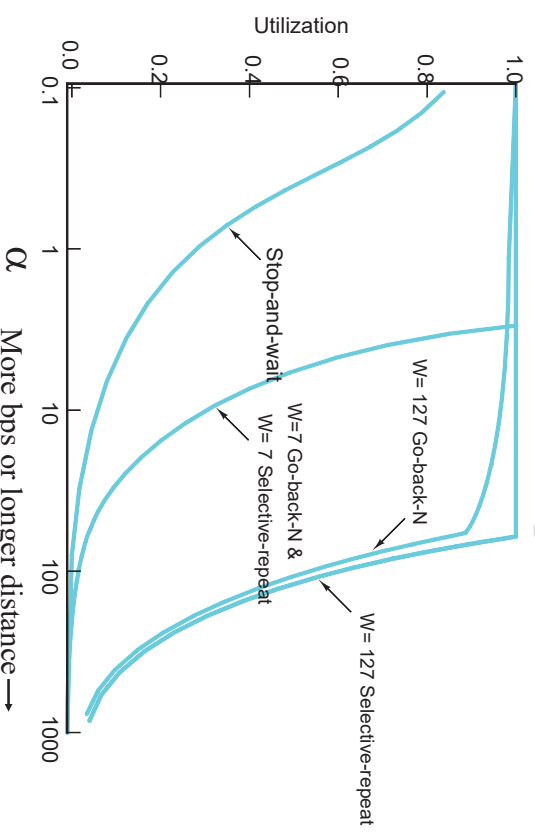

Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cs473.16/>

©2016 Raj Jain

3-26

Homework 3B

Problem 19 on page 302 of the textbook:

Consider the GBN protocol with a sender window size of 3 and a sequence number range of 1,024. Suppose that at time t , the next in-order packet that the receiver is expecting has a sequence number of k . Assume that the medium does not reorder messages. Answer the following questions:

- A. What are the possible sets of sequence numbers inside the sender's window at time t ? Justify your answer.
- B. What are all possible values of the ACK field in all possible messages currently propagating back to the sender at time t ? Justify your answer.

Window Flow Control:

C. How big window (in number of packets) is required for the channel utilization to be greater than 60% on a cross-country link of 4000 km running at 20 Mbps using 1 KByte packets?

Efficiency Principle:

D. Ethernet VI access protocol was designed to run at 10 Mbps over 2.5 Km using 1500 byte packets. This same protocol needs to be used at 100 Mbps at the same efficiency. What distance can it cover if the frame size is not changed?

Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cs473.16/>

©2016 Raj Jain

3-28



TCP

1. TCP Header Format, Options, Checksum
2. TCP Connection Management
3. Round Trip Time Estimation
4. Principles of Congestion Control
5. Slow Start Congestion Control


TCP

- Transmission Control Protocol
- Key Services:
 - **Send**: Please send when convenient
 - **Data stream push**: Destination TCP, please deliver it immediately to the receiving application.
 - ⇒ Source TCP, please send it now.
 - Set on last packet of an application message.
- **Urgent data signaling**: Destination TCP, please give this urgent data to the user out-of-band. Generally used for CTRL-C.

Key Features of TCP

- **Point-to-Point**: One sender, one receiver
- **Byte Stream**: No message boundaries. TCP makes "segments"
 - Bytes →
- **Maximum segment size (MSS)**
- **Connection Oriented**: Handshake to initialize states before data exchange
- **Full Duplex**: Bidirectional data flow in one connection
- **Reliable**: In-order byte delivery
- **Flow control**: To avoid receiver buffer overflow
- **Congestion control**: To avoid network router buffer overflow

TCP Segment Format (Cont)

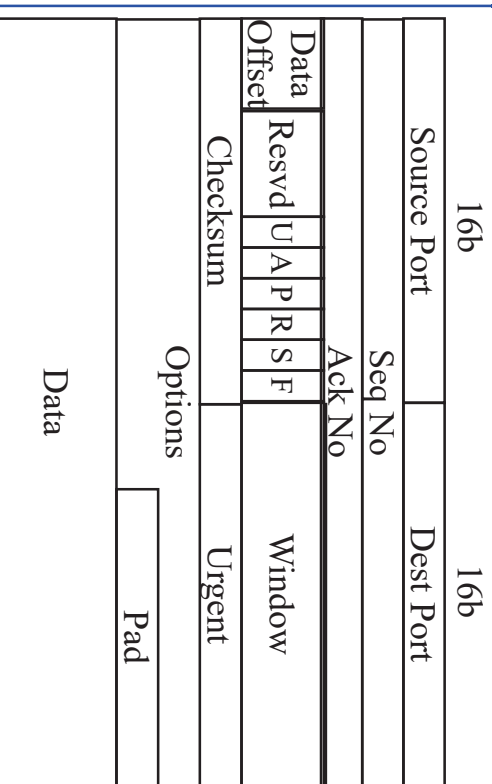

TCP Header Fields

- ❑ **Source Port** (16 bits): Identifies source user process
- ❑ **Destination Port** (16 bits)
21 = FTP, 23 = Telnet, 53 = DNS, 80 = HTTP, ...
- ❑ **Sequence Number** (32 bits): Sequence number of the first byte in the segment. If SYN is present, this is the initial sequence number (ISN) and the first data byte is ISN+1.
- ❑ **Ack number** (32 bits): Next byte expected
- ❑ **Data offset** (4 bits): Number of 32-bit words in the header
- ❑ **Reserved** (6 bits)

Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jain

3-33

TCP Header (Cont)

- ❑ **Control** (6 bits): Urgent pointer field significant, Ack field significant, Push function, Reset the connection, Synchronize the sequence numbers, No more data from sender

URG	ACK	PSH	RST	SYN	FIN
-----	-----	-----	-----	-----	-----

- ❑ **Window** (16 bits):
Will accept [Ack] to [Ack]+[window]-1

Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jain

3-34

TCP Header (Cont)

- ❑ **Checksum** (16 bits): covers the segment plus a pseudo header. Includes the following fields from IP header: source and dest adr, protocol, segment length. Protects from IP misdelivery.
- ❑ **Urgent pointer** (16 bits): Points to the byte following urgent data. Lets receiver know how much data it should deliver right away out-of-band.
- ❑ **Options** (variable):
Max segment size (does not include TCP header, default 536 bytes), Window scale factor, Selective Ack permitted, Timestamp, No-Op, End-of-options

Washington University in St. Louis

<http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jain

3-35

TCP Options

Kind	Length	Meaning
0	1	End of Valid options in header
1	1	No-op
2	4	Maximum Segment Size
3	3	Window Scale Factor
8	10	Timestamp

- ❑ **End of Options**: Stop looking for further option
- ❑ **No-op**: Ignore this byte. Used to align the next option on a 4-byte word boundary
- ❑ **Max Segment Size (MSS)**: Does not include TCP header

Washington University in St. Louis


<http://www.cse.wustl.edu/~jam/cse473-16/>

©2016 Raj Jain

3-36

TCP Checksum

- ❑ Checksum is the 16-bit one's complement of the one's complement sum of a pseudo header of information from the IP header, the TCP header, and the data, padded with zero octets at the end (if necessary) to make a multiple of two octets.
- ❑ Checksum field is filled with zeros initially
- ❑ TCP length (in octet) is not transmitted but used in calculations.
- ❑ Efficient implementation in RFC1071.

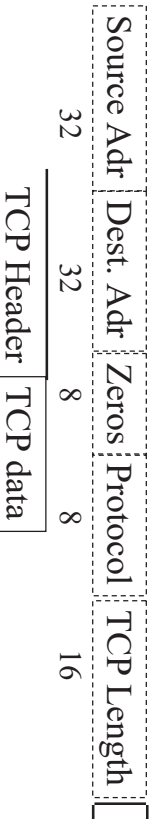

Washington University in St. Louis


<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-37

TCP Connection Management

- ❑ Connection Establishment
 - ❑ Three way handshake
 - ❑ SYN flag set
 - ⇒ Request for connection
- ❑ Connection Termination
 - ❑ Close with FIN flag set
 - ❑ Abort

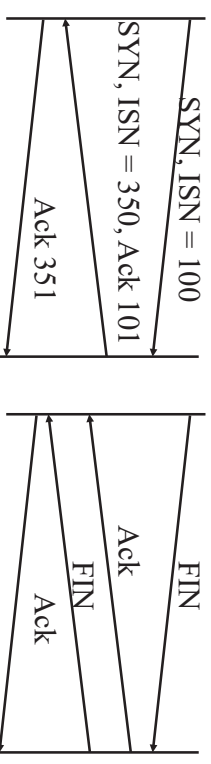


Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-38

Example RTT estimation:

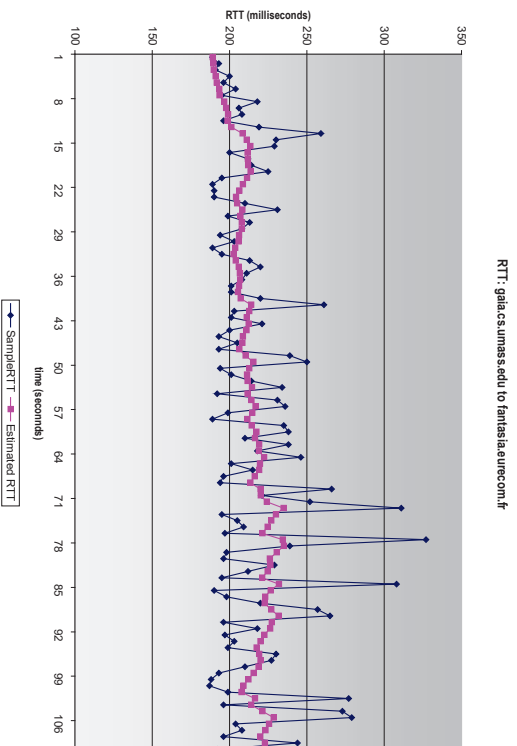

Washington University in St. Louis


<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-39

Round Trip Time Estimation

- ❑ Measured round trip time (SampleRTT) is very random.
- ❑ EstimatedRTT=(1- α)EstimatedRTT+ α SampleRTT
- ❑ DevRTT = (1- β)DevRTT+ β |SampleRTT-EstimatedRTT|
- ❑ TimeoutInterval=EstimatedRTT+4 DevRTT

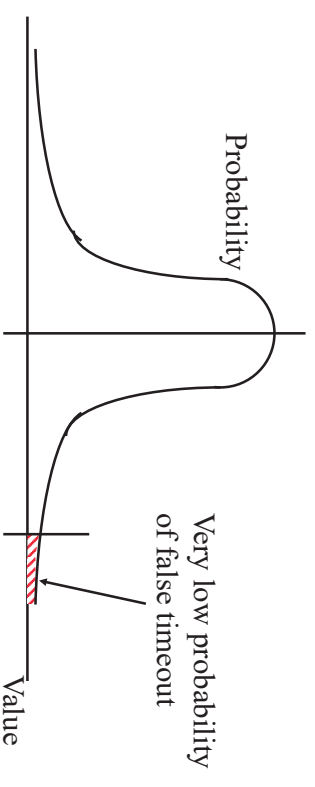

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-40

Our Research on Congestion Control



- Early 1980s Digital Equipment Corporation (DEC) introduced Ethernet products
 - Noticed that throughput goes down with a higher-speed link in middle (because no congestion mechanisms in TCP)
 - Results:
 1. Timeout \Rightarrow Congestion
 - \Rightarrow Reduce the TCP window to one on a timeout [Jain 1986]
 2. Routers should set a bit when congested (DEChit). [Jain, Ramakrishnan, Chiu 1988]
 3. Introduced the term “Congestion Avoidance”
 4. Additive increase and multiplicative decrease (AIMD principle) [Chiu and Jain 1989]
 - There were presented to IETF in 1986.
 - \Rightarrow Slow-start based on Timeout and AIMD [Van Jacobson 1988]

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473/16/>

©2016 Raj Jain

3-41

Slow Start Congestion Control

- Window = Flow control avoids receiver overrun
- Need congestion control to avoid network overrun
- The sender maintains two windows:
 - Credits from the receiver
 - Congestion window from the network
- Congestion window is always less than the receiver window
- Starts with a congestion window (CWND) of 1 max segment size (MSS)
 - \Rightarrow Do not disturb existing connections too much.
- Increase CWND by 1 MSS every time an ack is received
- Assume CWND is in bytes

Washington University in St. Louis


<http://www.cse.wustl.edu/~jain/cse473/16/>

©2016 Raj Jain

3-42

Slow Start (Cont)

- If segments lost, remember slow start threshold (SSThresh) to CWND/2
 - Set CWND to 1 MSS
 - Increment by 1MSS per ack until SSThresh
 - Increment by 1 MSS*MSS/CWND per ack afterwards

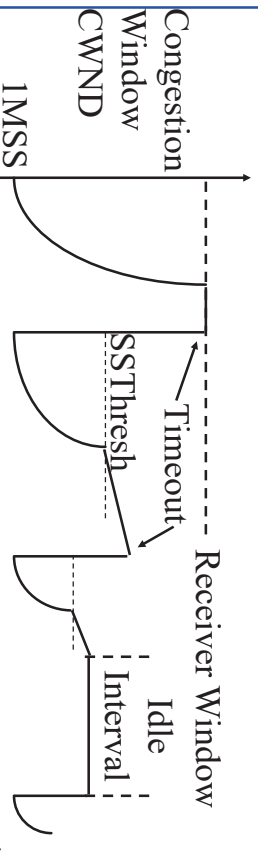

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473/>

Time

©2016 Raj Jain

3-43

Slow Start (Cont)

- At the beginning, SSThresh = Receiver window
- After a long idle period (exceeding one round-trip time), reset the congestion window to one.
- If CWND is W MSS, W acks are received in one round trip.
- Below SSThresh, CWND is increased by 1MSS on every ack
 - \Rightarrow CWND increases to $2W$ MSS in one round trip
 - \Rightarrow CWND increases exponentially with time
- Exponential growth phase is also known as “*Slow start*” phase
- Above SSThresh, CWND is increased by MSS/CWND on every ack
 - \Rightarrow CWND increases by 1 MSS in one round trip
 - \Rightarrow CWND increases linearly with time
- The linear growth phase is known as “*congestion avoidance*” phase

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473/16/>


©2016 Raj Jain

3-44

Explicit Congestion Notification (ECN)

- Explicit congestion notification (ECN) is based on our DECBit research. Two bits in IP Header:
 - 00: Transport is not capable of ECN (e.g., UDP)
 - 01: Transport is capable of ECN
 - 10: Transport is capable of ECN
 - 11: Congestion experienced (CE)

- When a router encounters congestion, instead of dropping the datagram, it marks the two bits as “11” congestion experienced

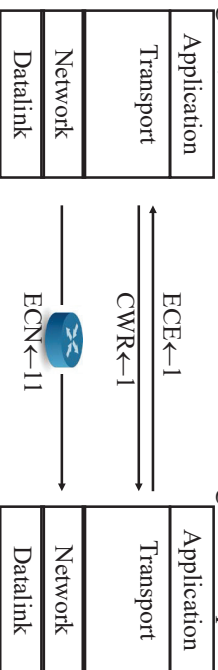

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-49



TCP: Summary

- TCP uses port numbers for multiplexing
- TCP provides reliable full-duplex connections.
- TCP is stream based and has window flow control
- Slow-start congestion control works on timeout
- Explicit congestion notification works using ECN bits

Washington University in St. Louis


<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-51

ECN (Cont)

- On receiving “CE” code point, the receiver sends “ECN Echo (ECE)” flag in the TCP header
- On seeing the ECE flag, the source reduces its congestion window, and sets “Congestion Window Reduced (CWR)” flag in outgoing segment
- On receiving “CWR” flag, the receiver, stops setting ECE bit

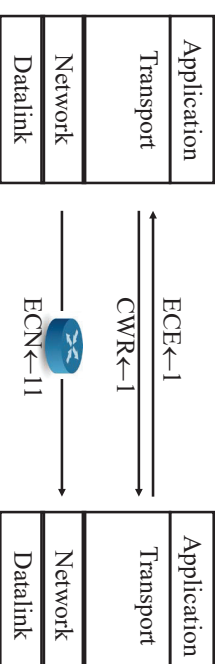

Ref: https://en.wikipedia.org/wiki/Explicit_Congestion_Notification

Washington University in St. Louis


<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-50

Homework 3C

- Consider Figure below. Assuming TCP Reno is the protocol experiencing the behavior shown above, answer the following questions. In all cases, you should provide a short discussion justifying your answer.

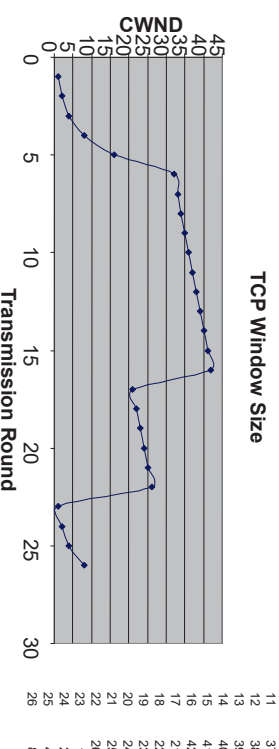

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-52

Homework 3C (Cont)

- A. Identify the interval of time when TCP slow start is operating.
- B. Identify the intervals of time when TCP congestion avoidance is operating.
- C. After the 16th transmission round, is segment loss detected by a triple duplicate ACK or by a timeout?
- D. After the 22nd transmission round, is segment loss detected by a triple duplicate ACK or by a timeout?
- E. What is the initial value of ssthresh at the first transmission round?
- F. What is the value of ssthresh at the 18th transmission round?
- G. What is the value of ssthresh at the 24th transmission round?

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-53

Homework 3C (Cont)

- H. During what transmission round is the 70th segment sent?
- I. Assuming a packet loss is detected after the 26th round by the receipt of a triple duplicate ACK, what will be the values of the congestion window size and of ssthresh?
- J. Suppose TCP Tahoe is used (instead of TCP Reno), and assume that triple duplicate ACKs are received at the 16th round. What are the ssthresh and the congestion window size at the 19th round?
- K. Again suppose TCP Tahoe is used, and there is a timeout event at the end of 22nd round. How many packets have been sent out from 17th round till 22nd round, inclusive?


Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-54

Summary



1. Multiplexing/demultiplexing by a combination of source and destination IP addresses and port numbers.
2. Longer distance or higher speed
⇒ Larger α ⇒ Larger window is better
3. Window flow control is better for long-distance or high-speed networks
4. UDP is connectionless and simple.
No flow/error control. Has error detection.
5. TCP provides full-duplex connections with flow/error/congestion control.

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-55

Lab 3B: TCP

- In Wireshark, open the trace file `tcp-ethereal-trace-1` in <http://gaito.cs.umass.edu/wireshark-labs/wireshark-traces.zip> and answer the following:
 1. What is the IP address and TCP port number used by the client computer (source) to transfer the file to `gaito.cs.umass.edu`?
 2. What is the IP address and port number used by `gaito.cs.umass.edu` to receive the file.
 3. What is the sequence number of the TCP SYN segment that is used to initiate the TCP connection between the client computer and `gaito.cs.umass.edu`? What is it in the segment that identifies the segment as a SYN segment?
 4. What is the sequence number of the SYN ACK segment sent by `gaito.cs.umass.edu` to the client computer in reply to the SYN? What is the value of the ACKnowledgement field in the SYN ACK segment? How did `gaito.cs.umass.edu` determine that value? What is it in the segment that identifies the segment as a SYN ACK segment?

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-56

Lab 3B: TCP (Cont)

5. What is the sequence number of the TCP segment containing the HTTP POST command? Note that in order to find the POST command, you'll need to dig into the packet content field at the bottom of the Wireshark window, looking for a segment with a "POST" within its DATA field.
6. Consider the TCP segment containing the HTTP POST as the first segment in the TCP connection. What are the sequence numbers of the first six segments in the TCP connection (including the segment containing the HTTP POST)? At what time was each segment sent? When was the ACK for each segment received? Given the difference between when each TCP segment was sent, and when its acknowledgement was received, what is the RTT value for each of the six segments?

Lab 3B: TCP (Cont)


7. What is the length of each of the first six TCP segments?
8. What is the minimum amount of available buffer space advertised at the receiver for the entire trace? Does the lack of receiver buffer space ever throttle the sender?
9. Are there any retransmitted segments in the trace file? What did you check for (in the trace) in order to answer this question?
10. How much data does the receiver typically acknowledge in an ACK? Can you identify cases where the receiver is ACKing every other received segment (see Table 3.2 on page 247 in the text)?
11. What is the throughput (bytes transferred per unit time) for the TCP connection? Explain how you calculated this value.

Optional Homework 3D

Try but do not submit.

A TCP entity opens a connection and uses slow start. Approximately how many round-trip times are required before TCP can send N segments.

Hint:



Acronyms

<input type="checkbox"/> ACK	ACKnowledgement
<input type="checkbox"/> AIMD	Additive increase and multiplicative decrease
<input type="checkbox"/> ARQ	Automatic Repeat Request
<input type="checkbox"/> CE	Congestion Experienced
<input type="checkbox"/> CRC	Cyclic Redundancy Check
<input type="checkbox"/> CWND	Congestion Window
<input type="checkbox"/> CWR	Congestion Window Reduced
<input type="checkbox"/> DA	Destination Address
<input type="checkbox"/> DEC	Digital Equipment Corporation
<input type="checkbox"/> DECBit	DEC's bit based congestion scheme
<input type="checkbox"/> DevRTT	Deviation of RTT
<input type="checkbox"/> DNS	Domain Name System
<input type="checkbox"/> DP	Destination Port
<input type="checkbox"/> ECE	Explicit Congestion Experienced
<input type="checkbox"/> ECN	Explicit Congestion Notification
<input type="checkbox"/> FIN	Final

Acronyms (Cont)

- FTP File Transfer Protocol
- GBN Go-Back N
- HTTP Hyper-Text Transfer Protocol
- IETF Internet Engineering Task Force
- IP Internet Protocol
- ISN Initial Sequence Number
- KB Kilo-Byte
- MSS Maximum segment size
- PBX Private Branch Exchange
- PSH Push
- RFC Request for Comments
- RM Resource Management
- RST Reset
- RTT Round-Trip Time
- SA Source Address
- SACK Selective Acknowledgement

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-61

Acronyms (Cont)

- SMTP Simple Mail Transfer Protocol
- SP Source Port
- SSThresh Slow Start Threshold
- SYN Synchronization
- SYNACK SYN Acknowledgement
- TCP Transmission Control Protocol
- UDP User Datagram Protocol
- URG Urgent
- VCI Virtual Circuit Identifiers

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-62

Scan This to Download These Slides



Raj Jain

<http://rajjain.com>

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-63

Related Modules

 CSE 473s: Introduction to Computer Networks (Course Overview),
http://www.cse.wustl.edu/~jain/cse473-16/ftp/i_0int.pdf

 CSE473S: Introduction to Computer Networks (Fall 2016),
<http://www.cse.wustl.edu/~jain/cse473-16/index.html> 

 Wireless and Mobile Networking (Spring 2016),
<http://www.cse.wustl.edu/~jain/cse574-16/index.html>

 CSE571S: Network Security (Fall 2014),
<http://www.cse.wustl.edu/~jain/cse571-14/index.html> 

 Audio/Video Recordings and Podcasts of Professor Raj Jain's Lectures,
<https://www.youtube.com/channel/UCN4-5wZNP9-ruOzQMs-8NUw>

Washington University in St. Louis

<http://www.cse.wustl.edu/~jain/cse473-16/>

©2016 Raj Jain

3-64