
The Network Layer: Control Plane

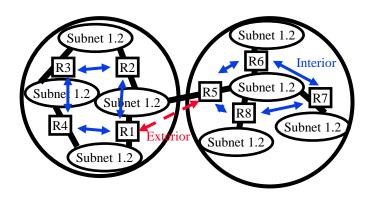

Raj Jain

Washington University in Saint Louis Saint Louis, MO 63130 Jain@wustl.edu

Audio/Video recordings of this lecture are available on-line at:

http://www.cse.wustl.edu/~jain/cse473-22/

http://www.cse.wustl.edu/~jain/cse473-22/

©2022 Raj Jain



- 1. Routing Algorithms: Link-State, Distance Vector Dijkstra's algorithm, Bellman-Ford Algorithm
- 2. Routing Protocols: OSPF, BGP
- 3. SDN Control Plane
- 4. ICMP
- 5. SNMP

Note: This class lecture is based on Chapter 5 of the textbook (Kurose and Ross) and the figures provided by the authors.

Student Questions

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

Network Layer Functions

- □ Forwarding: Deciding what to do with a packet using a routing table ⇒ Data plane
- \square Routing: Making the routing table \Rightarrow Control Plane

Student Questions



Routing Algorithms

- 1. Graph abstraction
- 2. Distance Vector vs. Link State
- 3. Dijkstra's Algorithm
- 4. Bellman-Ford Algorithm

Student Questions

Rooting or Routing

- □ *Rooting* is what fans do at football games, what pigs do for truffles under oak trees in the Vaucluse, and what nursery workers intent on propagation do to cuttings from plants.
- *Routing* is how one creates a beveled edge on a table top or sends a corps of infantrymen into full scale, disorganized retreat

Student Questions

Ref: Piscitello and Chapin, "Open Systems Networking: TCP/IP and OSI," Adison-Wesley, 1993, p413

Routeing or Routing

- □ Routeing: British
- Routing: American
- □ Since Oxford English Dictionary is much heavier than any other dictionary of American English, British English generally prevails in the documents produced by ISO and CCITT; wherefore, most of the international standards for routing standards use the routeing spelling.

Student Questions

Ref: Piscitello and Chapin, "Open Systems Networking: TCP/IP and OSI," Adison-Wesley, 1993, p413

Graph abstraction

- \Box Graph: G = (N,E)
- Arr N = Set of routers = { u, v, w, x, y, z }
- \square Each link has a cost, e.g., c(w,z) = 5
- Routing Algorithms find the least cost path
- We limit to "Undirected" graphs, i.e., cost is same in both directions

Student Questions

Distance Vector vs. Link State

Distance Vector:

- □ Vector of distances to all nodes, e.g.,u: {u:0, v:2, w:5, x:1, y:2, z:4}
- Sent to neighbors, e.g., u will send to v, w, x
- □ Large vectors to small # of nodes Tell about the world to neighbors
- Older method. Used in RIP.

Link State:

- □ Vector of link cost to neighbors, e.g, u: {v:2, w:5, x:1}
- □ Sent to all nodes, e.g., u will send to v, w, x, y, z
- Small vectors to large # of nodes
 Tell about the neighbors to the world
- Newer method. Used in OSPF.

Student Questions

Dijkstra's Algorithm

- Goal: Find the least cost paths from a given node to all other nodes in the network
- Notation:
 - c(i,j) = Link cost from i to j if i and j are connected
 - D(k) = Total path cost from s to k
 - N' = Set of nodes so far for which the least cost path is known
- Method:
 - > Initialize: N'= $\{u\}$, D(v) = c(u,v) for all neighbors of u
 - > Repeat until N includes all nodes:
 - □ Find node $w \notin N'$, whose D(w) is minimum
 - □ Add w to N'

Student Questions

☐ Is Dijkstra's Algorithm ever implemented with min-priority queue in Networking?


Implementations are not standardized. So yes, someone may implement it using heaps.

■ Is there any tradeoff between making it faster vs. the space required?

Yes. That's almost always true. Any computation can be made faster by caching.

http://www.cse.wustl.edu/~jain/cse473-22/

Dijkstra's Algorithm: Example

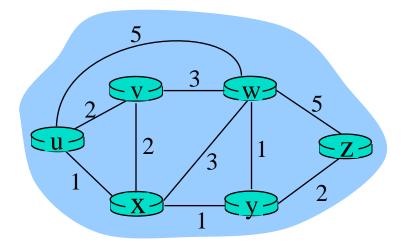

	N'	D(v)	Path	D(w)	Path	D(x)	Path	D(y)	Path	D(z)	Path
0	{u}	2	u-v	5	u-w	1	u-x	8	ı	8	ı
1	{u, x}	2	u-v	4	u-x-w			2	u-x-y	8	1
2	$\{u, x, y\}$	2	u-v	3	u-x-y-w					4	u-x-y-z
3	$\{u, x, y, v\}$			3	u-x-y-w					4	u-x-y-z
4	$\{u, x, y, v, w\}$									4	u-x-y-z
5	$\{u, x, y, v, w, z\}$										


Student Questions


Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/


Complexity and Oscillations

- □ *Algorithm complexity: n* nodes
 - > Each iteration: need to check all nodes, w, not in N
 - > n(n+1)/2 comparisons: $O(n^2)$
 - \triangleright More efficient implementations possible: O($n \log n$)
- Oscillations Possible: e.g., support link cost equals amount of carried traffic






given these costs, find new routing.... resulting in new costs







given these costs, find new routing.... resulting in new costs

Student Questions

■ Why is it n+1 in the complexity n(n+1)/2?


$$1+2+3+4+...+n = n(n+1)/2$$

- □ Is the *n* in the runtime for Djiktra's algorithm the number of routers?

http://www.cse.wustl.edu/~jain/cse473-22/

Homework 5A

[12 points] Prepare the routing calculation <u>table</u> for node 1 in the following network using Dijkstra's algorithm. Explain how you computed new entries in each row.

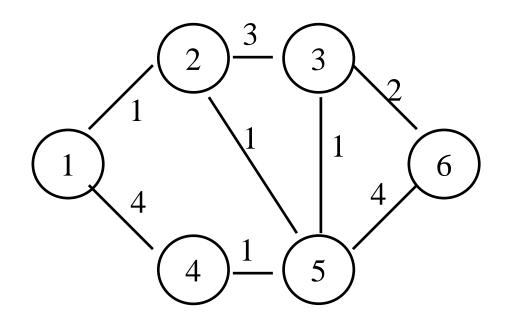

Student Questions

■ Should the routing table look like the one on slide 10? Which entries should each node have?

No. Computation is shown slide 5-10. Routing tables were shown in Slide 4-4.

Prefix	Next Router	Interface
126.23.45.67/32	125.200.1.1	1
128.272.15/24	125.200.1.2	2
128.272/16	125.200.1.1	1

http://www.cse.wustl.edu/~jain/cse473-22/


Bellman-Ford Algorithm

- Notation:
 - u = Source node
 - c(i,j) = link cost from i to j
 - h = Number of hops being considered
 - $D_{u}(n) = Cost of h-hop path from u to n$
- Method:
 - 1. Initialize: $D_{ii}(n) = \infty$ for all $n \neq u$; $D_{ii}(u) = 0$
 - 2. For each node: $D_u(n) = \min_j [D_u(j) + c(j,n)]$
 - 3. If any costs change, repeat step 2


Student Questions

Bellman Ford Example 1 node x table cost to cost to cost to x y \mathbf{Z} \mathbf{Z} 0 2 from from from $\infty \infty$ $\infty \infty$ node y table cost to cost to cost to $\mathbf{X} \quad \mathbf{y} \quad \mathbf{Z}$ $\mathbf{X} \mathbf{y} \mathbf{z}$ x y z ∞ ∞ ∞ from from from $\infty \infty$ node z table cost to cost to cost to x y z $\mathbf{X} \mathbf{y} \mathbf{z}$ 0 2 $\infty \infty \infty$ from from from $\infty \infty$ 3 http://www.cse.wustl.edu/~jain/cse473-22/ ©2022 Raj Jain Washington University in St. Louis

Bellman-Ford Example 2

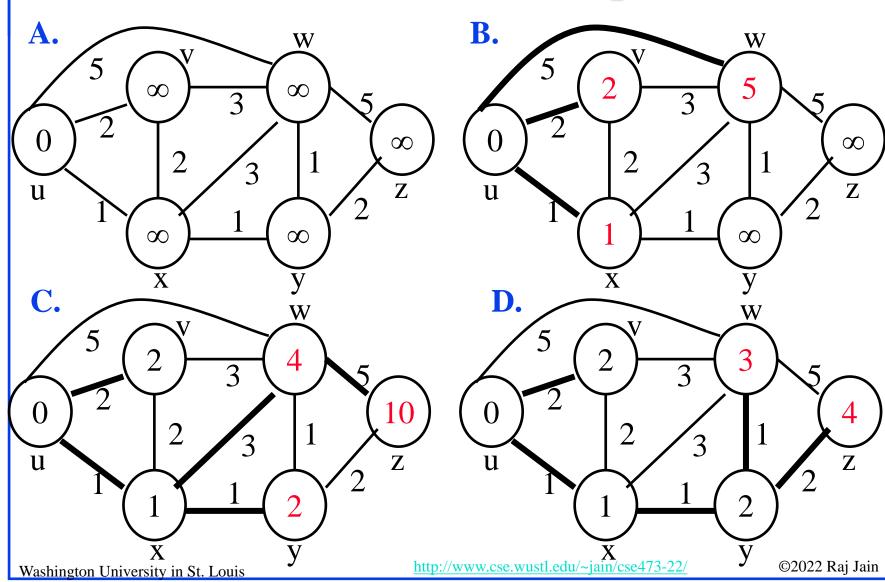

Bellman-Ford: Tabular Method

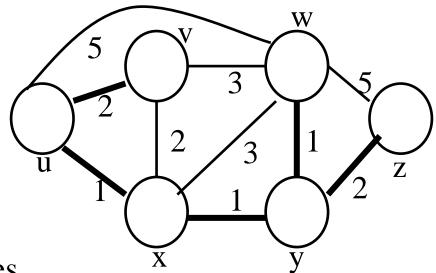

If cost changes

⇒ Recompute the costs to all neighbors


h	D(v)	Pa	th	D(w)	Path		D(x)	Path	D(y)	Path	D(z)	Path	
0	8	-		8	-		8	-	8	-	8	-	
1	2	u-	1	5	u-w		1	u-x	8	-	8	-	
2	2	u-	J	4	u-x-	V	1	u-x	2	u-x-y	10	u-w-z	
3	2	u-	J	3	u-x-	-W	1	u-x	2	u-x-y	4	u-x-y	-Z
4	2	u-	7	3	u-x-	-W	1	u-x	2	u-x-y	4	u-x-y	-Z

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

©2022 Raj Jain

Counting to Infinity Problem

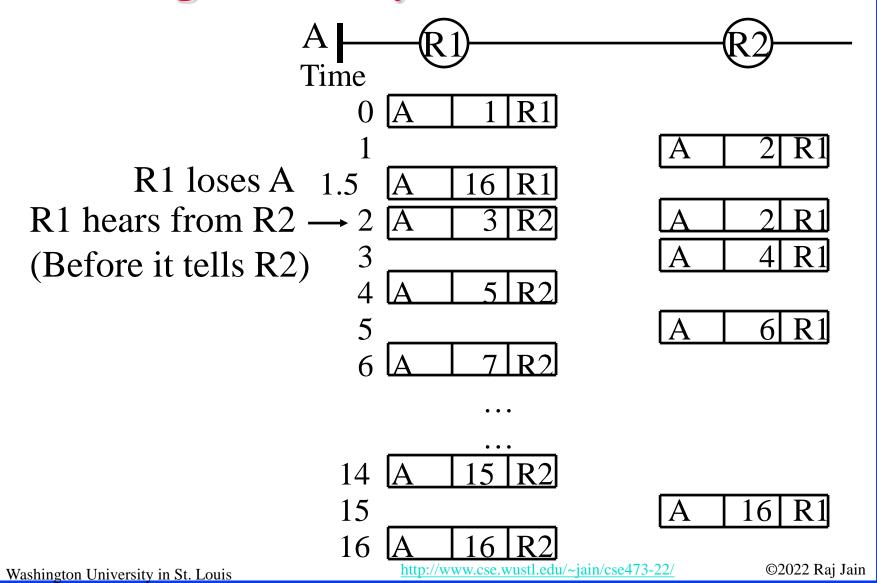

Student Questions

5-17



Routing Algorithms: Summary

- 1. Distance Vectors: Distance to all nodes in the network sent to neighbors. Small # of large messages.
- 2. Link State: Cost of link to neighbors sent to entire network. Large # of small messages.
- 3. Dijkstra's algorithm is used to compute shortest path using link state
- 4. Bellman Ford's algorithm is used to compute shortest paths using distance vectors
- 5. Distance Vector algorithms suffer from the count-to-infinity problem

Student Questions

Ref: Read Section 5.2 of the textbook and try review questions R3-R6.

Homework 5B

[10 points] Prepare the routing calculation <u>table</u> for node 1 in the following network using the Bellman-Ford Algorithm. Explain how you computed new entries in each row.

$\begin{array}{c|c} & 3 \\ \hline & 1 \\ \hline & 1 \\ \hline & 4 \\ \hline & 4 \\ \hline & 4 \\ \hline & 4 \\ \hline & 5 \\ \end{array}$

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/



Routing Protocols


- 1. Autonomous Systems (AS)
- 2. Open Shortest Path First (OSPF)
 - OSPF Areas
- 3. Border Gateway Protocol (BGP)

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/

Autonomous Systems

■ An internet connected by homogeneous routers under the administrative control of a single entity

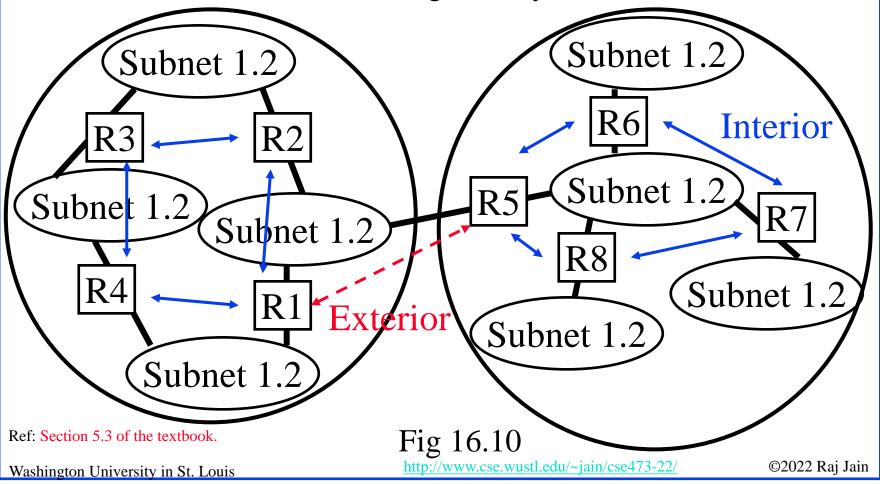

Routing Protocols


- □ Interior Router Protocol (IRP): Used for passing routing information among routers internal to an autonomous system. Also known as IGP.
 - > Examples: RIP, OSPF, IGRP
- Exterior Router Protocol (ERP): Used for passing routing information among routers between autonomous systems. Also known as EGP.
 - > Examples: EGP, BGP, IDRP
 Note: EGP is a class as well as an instance in that class.

Open Shortest Path First (OSPF)

- Uses true metrics (not just hop count)
- Uses subnet masks
- Allows load balancing across equal-cost paths
- Supports type of service (ToS)
- Allows external routes (routes learnt from other autonomous systems)
- Authenticates route exchanges
- Quick convergence
- □ Direct support for multicast
- □ Link state routing ⇒ Each router broadcasts its connectivity with neighbors to entire network

Student Questions

OSPF Areas

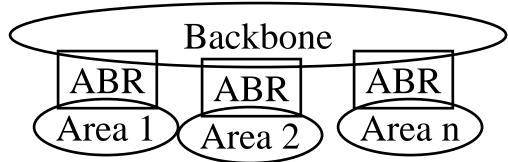


- □ Large networks are divided into areas to reduce routing traffic.
- □ LSAs are flooded throughout the area
- □ Area border routers (ABRs) summarize the topology and transmit it to the backbone area
- Backbone routers forward it to other areas
- □ ABRs connect an area with the backbone area. ABRs contain OSPF data for all backbone areas.
- ☐ If there is only one area in the AS, there is no backbone area and there are no ABRs.

Student Questions

Border Gateway Protocol

- □ Inter-autonomous system protocol [RFC 1267]
- Used since 1989 but not extensively until recently
- Runs on TCP (segmentation, reliable transmission)
- Advertises all transit ASs on the path to a destination address
- A router may receive multiple paths to a destination ⇒ Can choose the best path
- □ iBGP used to forward paths inside the AS. eBGP used to exchange paths between ASs.



Ref: Section 5.4 of the textbook.

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/


©2022 Raj Jain

BGP Operations

- BGP systems initially exchange entire routing tables. Afterwards, only updates are exchanged.
- □ BGP messages have the following information:
 - > Origin of path information: RIP, OSPF, ...
 - > AS_Path: List of ASs on the path to reach the dest
 - > Next_Hop: IP address of the border router to be used as the next hop to reach the dest
 - > Unreachable: If a previously advertised route has become unreachable
- BGP speakers generate update messages to all peers when it selects a new route or some route becomes unreachable.

Student Questions

BGP Routing Policy Example

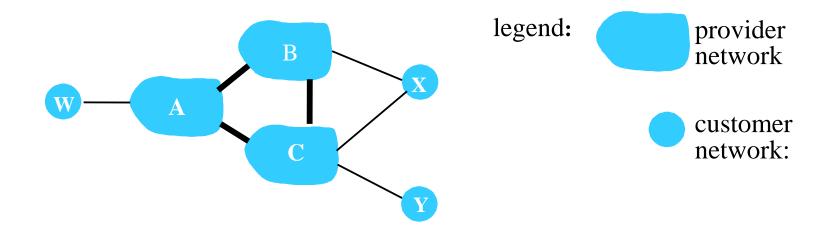


- A,B,C are provider networks
- X,W,Y are customer (of provider networks)
- X is dual-homed: attached to two networks
 - > X does not want to route from B via X to C
 - > .. so X will not advertise to B a route to C

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/

BGP Routing Policy Example (Cont)

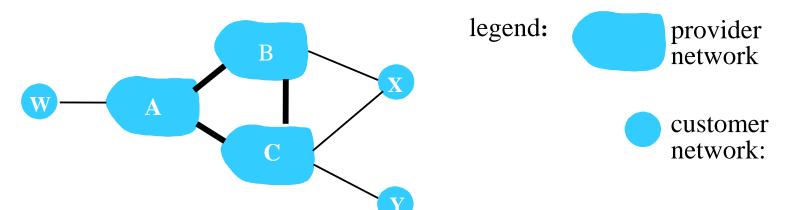

- A advertises path A-W to B
- B advertises path B-A-W to X
- Should B advertise path B-A-W to C?
 - > No way! B gets no "revenue" for routing C-B-A-W since neither W nor C are B's customers
 - > B wants to force C to route to w via A
 - > B wants to route *only* to/from its customers!

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/

Intra- vs. Inter-AS Routing

□ Policy:

- > Inter-AS: admin wants control over how its traffic routed, who routes through its net.
- > Intra-AS: single admin, so no policy decisions needed
- **□** Scale:
 - > Hierarchical routing saves table size, reduced update traffic
- **□** Performance:
 - > Intra-AS: can focus on performance
 - > Inter-AS: policy may dominate over performance

Student Questions



Routing Protocols: Summary

- 1. OSPF uses link-state routing and divides the autonomous systems into multiple areas.
 - Area border router, AS boundary router, designated router
- 2. BGP is an inter-AS protocol \Rightarrow Policy driven


Student Questions

Ref: Read Section 5.3 and 5.4 of the textbook and try review questions R7-R13.

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

SDN Control Plane

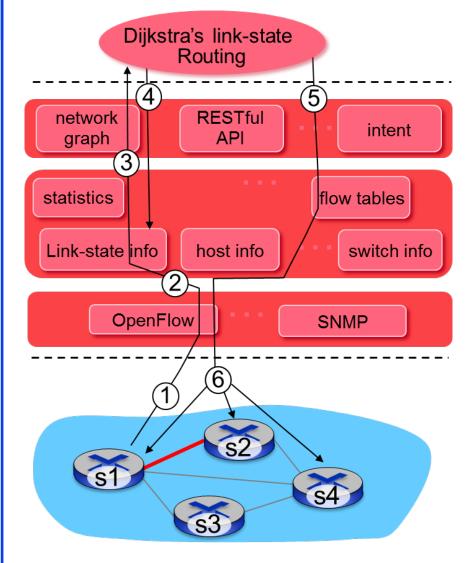


- 1 S1, experiencing link failure using OpenFlow port status message to notify controller
- 2 SDN controller receives OpenFlow message, updates link status info
- 3 Dijkstra's routing algorithm application has previously registered to be called when ever link status changes. It is called.
- Dijkstra's routing algorithm access network graph info, link state info in controller, computes new routes

Student Questions

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

Controller Example: OpenDaylight

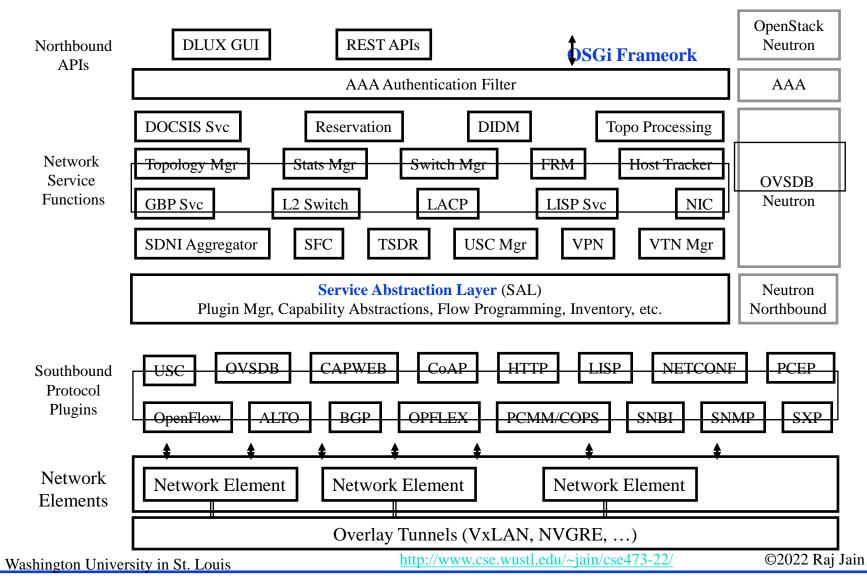

OpenDaylight SDN Controller

- Multi-company collaboration under Linux foundation
- Many projects including OpenDaylight Controller
- Dynamically linked in to a Service Abstraction Layer (SAL)
 - ⇒ SAL figures out how to fulfill the service requested by higher layers irrespective of the southbound protocol
- Modular design
- → A rich set of North-bound APIs via RESTful (Web page like) services

Student Questions

Ref: Read Section 5.5 and try review questions R14-R18.

ICMP

- Internet Control Message Protocol
- Required companion to IP. Provides feedback from the network.
- □ ICMP: Used by IP to send error and control messages
- □ ICMP uses IP to send its messages (Not UDP)
- □ ICMP does not report errors on ICMP messages.
- □ ICMP reports error only on the first fragment

	1	ICMP Header	ICMP Data
	IP Header	IP I	Data
Datalink Header		Datalink Da	ıta

http://www.cse.wustl.edu/~jain/cse473-22/

©2022 Raj Jain

Student Questions

Washington University in St. Louis

ICMP: Message Types

IP Header
Type of Message
Error Code
Checksum
Parameters, if any
Information

8b 8b 16b Var

Var

Type	Message
0	Echo reply
3	Destination unreachable
4	Source quench
5	Redirect
8	Echo request
11	Time exceeded
12	Parameter unintelligible
13	Time-stamp request
14	Time-stamp reply
15	Information request
16	Information reply
17	Address mask request
18	Address mask reply
http://www.cse	.wustl.edu/~jain/cse473-22/ ©2022 Raj Jain

Student Questions

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

ICMP Messages

- Source Quench: Please slow down! I just dropped one of your datagrams.
- □ Time Exceeded: Time to live field in one of your packets became zero." or "Reassembly timer expired at the destination.
- □ Fragmentation Required: Datagram was longer than MTU and "No Fragment bit" was set.
- Address Mask Request/Reply: What is the subnet mask on this net? Replied by "Address mask agent"
- □ PING uses ICMP echo
- □ Tracert uses TTL expired

Student Questions

Ref: Read Section 5.6 of the textbook and try erview questions R19-R20.

Trace Route Example

C:\>tracert www.google.com

Tracing route to www.l.google.com [74.125.93.147] over a maximum of 30 hops:

```
1 3 ms 1 ms 1 ms 192.168.0.1
2 12 ms 10 ms 9 ms bras4-l0.stlsmo.sbcglobal.net [151.164.182.113]
3 10 ms 8 ms 8 ms dist2-vlan60.stlsmo.sbcglobal.net [151.164.14.163]
4 9 ms 7 ms 7 ms 151.164.93.224
5 25 ms 22 ms 22 ms 151.164.93.49
6 25 ms 22 ms 22 ms 151.164.251.226
7 30 ms 28 ms 28 ms 209.85.254.128
8 61 ms 57 ms 58 ms 72.14.236.26
9 54 ms 52 ms 51 ms 209.85.254.226
10 79 ms 160 ms 67 ms 209.85.254.237
11 66 ms 57 ms 68 ms 64.233.175.14
12 60 ms 58 ms 58 ms qw-in-f147.google.com [74.125.93.147]
```

Trace complete.

Student Questions

Lab 5A: ICMP

- [14 points] Download the Wireshark traces from http://gaia.cs.umass.edu/wireshark-labs/wireshark-traces.zip
- Open icmp-ethereal-trace-1 in Wireshark. Select $View \rightarrow Expand All$. Answer the following questions:
- 1. Examine Frame 3.
 - A. What is the IP address of your host? What is the IP address of the destination host?
 - B. Why is it that an ICMP packet does not have source and destination port numbers?
 - c. What are the ICMP type and code numbers? What other fields does this ICMP packet have? How many bytes are the checksum, sequence number and identifier fields?

Student Questions

- 2. Examine Frame 4. What are the ICMP type and code numbers?
- Open *icmp-ethereal-trace-2* in Wireshark. Answer the following questions:
- 3. Examine Frame 2. What fields are included in this ICMP error packet?
- 4. Examine Frames 100, 101, and 102. How are these packets different from the ICMP error packet 2? Why are they not error packets?

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/



Network Management

- What is Network Management?
- Components of Network Management
- How is Network Managed?
- SNMP protocol

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/

What is Network Management?

- □ Traffic on Network = Data + Control + Management
- □ Data = Bytes/Messages sent by users
- □ Control = Bytes/messages added by the system to properly transfer the data (e.g., routing messages)
- Management = Optional messages to ensure that the network functions properly and to handle the issues arising from malfunction of any component
- □ If all components function properly, control is still required but management is optional.
- Examples:
 - > Detecting failures of an interface card at a host or a router
 - > Monitoring traffic to aid in resource deployment
 - > Intrusion Detection


Student Questions

Components of Network Management

- 1. <u>Fault Management:</u>
 - Detect, log, and respond to fault conditions
- 2. Configuration Management:
 - Track and control which devices are on or off
- 3. Accounting Management:
 - Monitor resource usage for records and billing
- 4. Performance Management:
 - Measure, report, analyze, and control traffic, messages
- 5. Security Management:
 - Enforce policy for access control, authentication, and authorization
- □ FCAPS

How is Network Managed?

- Management = Initialization, Monitoring, Control
- Manager, Agents, andManagement Information Base (MIB)

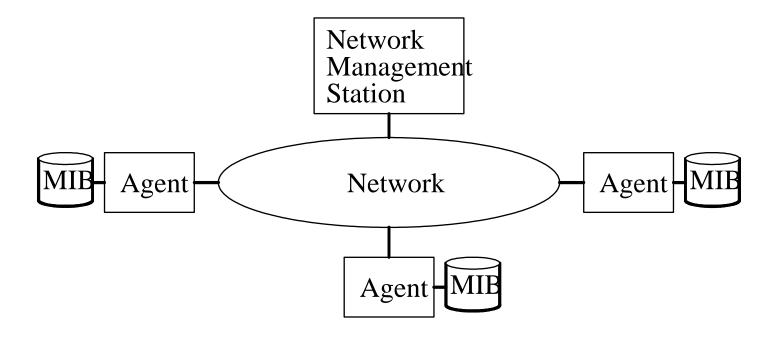


Student Questions

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

Example of Network Management

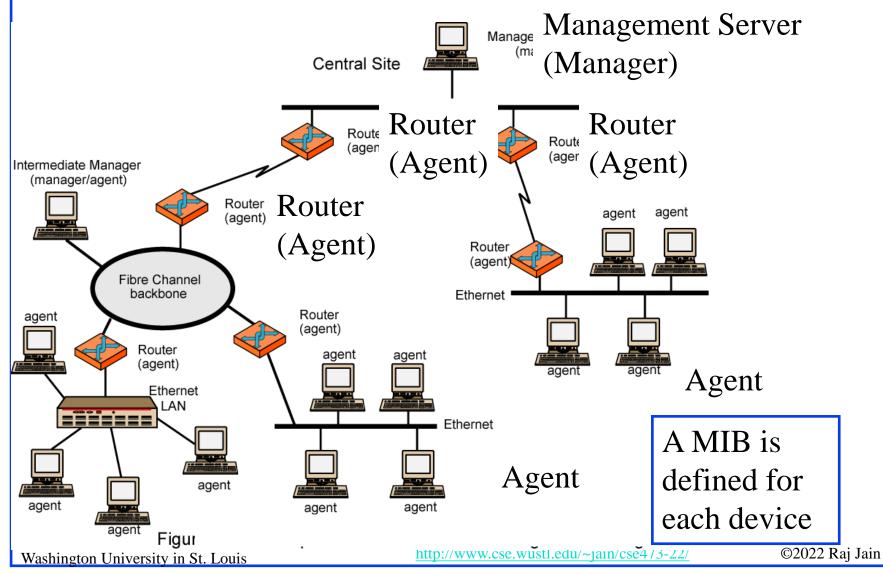

SNMP

- Based on Simple Gateway Management Protocol (SGMP) RFC 1028 Nov 1987
- □ SNMP = Simply Not My Problem [Marshall Rose] Simple Network Management Protocol
- □ RFC 1058, April 1988
- Only Five commands

Command	Meaning
get-request	Fetch a value
get-next-request	Fetch the next value (in a tree)
get-response	Reply to a fetch operation
set-request	Store a value
trap	An event


Student Questions


Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

SNMP protocol

Two ways to convey MIB info, commands:

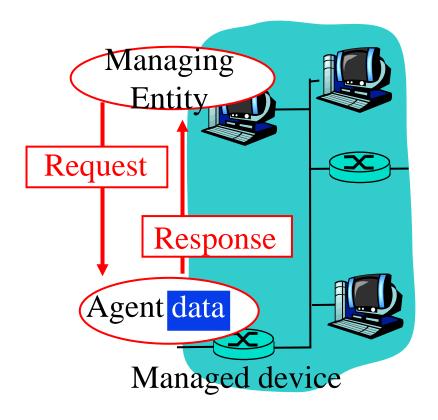

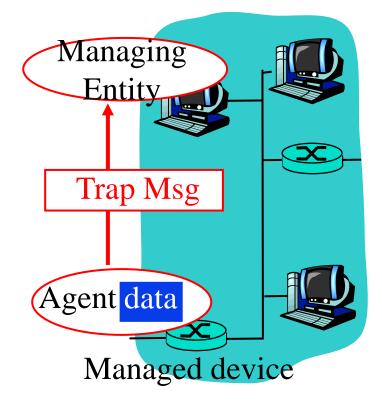

Request/response mode

Trap mode


http://www.cse.wustl.edu/~jain/cse473-22/

©2022 Raj Jain

Student Questions

Washington University in St. Louis

SNMP Message Formats

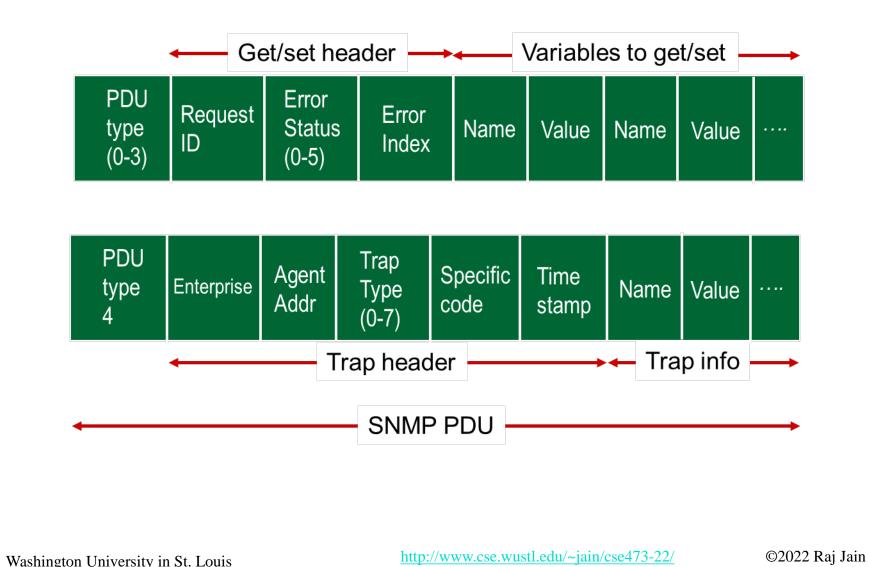



Network Management: Summary

- 1. Management = Initialization, Monitoring, and Control
- 2. Standard MIBs defined for each object
- 3. SNMP = Only 5 commands in the first version

Student Questions

Ref: Read Section 5.7 of the textbook and try review questions R21-R23.

Network Layer Control Plane: Summary



- 1. Dijkstra's algorithm allows path computation using link state
- 2. Bellman Ford's algorithm allows path computation using distance vectors.
- 3. OSPF is a link state IGP.
- 4. BGP is an EGP and uses path vectors
- 5. SDN controllers use various algorithms for centralized computation of path and other policies
- 6. ICMP is IP control protocol is used to convey errors
- 7. SNMP is the simple network management protocol to manage all devices and protocols in a network

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/

Lab 5B: ICMP Ping Programming

[25 points] In this lab, you will gain a better understanding of Internet Control Message Protocol (ICMP). You will learn to implement a Ping application using ICMP request and reply messages.

Ping is a computer network application used to test whether a particular host is reachable across an IP network. It is also used to self-test the network interface card of the computer or as a latency test. It works by sending ICMP "echo reply" packets to the target host and listening for ICMP "echo reply" replies. The "echo reply" is sometimes called a pong. Ping measures the round-trip time, records packet loss, and prints a statistical summary of the echo reply packets received (the minimum, maximum, and the mean of the round-trip times and in some versions the standard deviation of the mean).

Your task is to develop your own Ping application in Python. Your application will use ICMP but, in order to keep it simple, will not exactly follow the official specification in RFC 1739. Note that you will only need to write the client side of the program, as the functionality needed on the server side is built into almost all operating systems.

You should complete the Ping application so that it sends ping requests to a specified host separated by approximately one second. Each message contains a payload of data that includes a timestamp. After sending each packet, the application waits up to one second to receive a reply. If one second goes by without a reply from the server, then the client assumes that either the ping packet or the pong packet was lost in the network (or that the server is down).

Student Questions

Code

Below you will find the skeleton code for the client. You are to complete the skeleton code. <u>The places where you need to fill in code are marked with</u> **#Fill in start** and **#Fill in end**. Each place may require one or more lines of code. This code was written for Python V2.7 and may not run on higher versions.

Additional Notes

In "receiveOnePing" method, you need to receive the structure ICMP_ECHO_REPLY and fetch the information you need, such as checksum, sequence number, time to live (TTL), etc. Study the "sendOnePing" method before trying to complete the "receiveOnePing" method.

You do not need to be concerned about the checksum, as it is already given in the code.

This lab requires the use of raw sockets. In some operating systems, you may need administrator/root privileges to be able to run your Pinger program.

Testing the Pinger

First, test your client by sending packets to localhost, that is, 127.0.0.1.

Then, you should see how your Pinger application communicates across the network by pinging servers in different continents.

What to Hand in

You will hand in the complete client code and screenshots of your Pinger output for four target hosts: north-america.pool.ntp.org, europe.pool.ntp.org, asia.pool.ntp.org, south-america.pool.ntp.org

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

©2022 Raj Jain

Skeleton Python Code for the ICMP Pinger

Washington University in St. Louis

```
from socket import *
import os
import sys
import struct
import time
import select
import binascii
ICMP\_ECHO\_REQUEST = 8
def checksum(string):
     csum = 0
     countTo = (len(string) // 2) * 2
     count = 0
     while count < countTo:
              this Val = ord(string[count+1]) * 256 + ord(string[count])
              csum = csum + thisVal
              csum = csum & 0xffffffff
              count = count + 2
     if countTo < len(string):
              csum = csum + ord(string[len(string) - 1])
              csum = csum & 0xffffffff
     csum = (csum >> 16) + (csum & 0xffff)
     csum = csum + (csum >> 16)
     answer = ~csum
     answer = answer & Oxffff
     answer = answer >> 8 | (answer << 8 & 0xff00)
     return answer
```

Student Questions

```
def receiveOnePing(mySocket, ID, timeout, destAddr):
   timeLeft = timeout
   while 1:
         startedSelect = time.time()
         whatReady = select.select([mySocket], [], [], timeLeft)
         howLongInSelect = (time.time() - startedSelect)
         if whatReady[0] == []: # Timeout
                   return "Request timed out."
         timeReceived = time.time()
         recPacket, addr = mySocket.recvfrom(1024)
         #Fill in start
         #Fetch the ICMP header from the IP packet
         #Fill in end
         timeLeft = timeLeft - howLongInSelect
         if timeLeft <= 0:
                   return "Request timed out."
```

Student Questions

```
def sendOnePing(mySocket, destAddr, ID):
    # Header is type (8), code (8), checksum (16), id (16), sequence (16)
    myChecksum = 0
    # Make a dummy header with a 0 checksum
    # struct -- Interpret strings as packed binary data
    header = struct.pack("bbHHh", ICMP_ECHO_REQUEST, 0, myChecksum, ID, 1)
    data = struct.pack("d", time.time())
    # Calculate the checksum on the data and the dummy header.
    myChecksum = checksum(str(header + data))
    # Get the right checksum, and put in the header
    if sys.platform == 'darwin':
           # Convert 16-bit integers from host to network byte order
           myChecksum = htons(myChecksum) & 0xffff
    else:
           myChecksum = htons(myChecksum)
    header = struct.pack("bbHHh", ICMP_ECHO_REQUEST, 0, myChecksum, ID, 1)
    packet = header + data
    mySocket.sendto(packet, (destAddr, 1)) # AF_INET address must be tuple, not str
    # Both LISTS and TUPLES consist of a number of objects
    # which can be referenced by their position number within the object.
```

Student Questions

```
def doOnePing(destAddr, timeout):
    icmp = getprotobyname("icmp")
    # SOCK_RAW is a powerful socket type. For more details: http://sock-raw.org/papers/sock_raw
    mySocket = socket(AF_INET, SOCK_RAW, icmp)
    myID = os.getpid() & 0xFFFF # Return the current process i
    sendOnePing(mySocket, destAddr, myID)
    delay = receiveOnePing(mySocket, myID, timeout, destAddr)
    mySocket.close()
    return delay
def ping(host, timeout=1):
    # timeout=1 means: If one second goes by without a reply from the server,
    # the client assumes that either the client's ping or the server's pong is lost
    dest = gethostbyname(host)
    print("Pinging " + dest + " using Python:")
    print("")
    # Send ping requests to a server separated by approximately one second
    while 1:
            delay = doOnePing(dest, timeout)
            print(delay)
            time.sleep(1)# one second
    return delay
```

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/ ©2022 Raj Jain

Acronyms

ABR Area border router

API Application Programming Interface

□ AS Autonomous System

□ ASBR Autonomous System Boundary Router

□ BDR Backup Designated Router

□ BGP Border Gateway Protocol

□ BR Backbone Router

□ CAPWAP Control and Provisioning of Wireless Access Points

CCITT Consultative Committee for International Telegraph and

Telephone (now ITU-T)

CoAP Constrained Application Protocol

COPS Common Open Policy Service

□ DIDM Device Identifier and Driver Management

DLUX OpenDaylight User Interface

□ DOCSIS Data over Cable Service Interface Specification

□ DR Designated Router

eBGP exterior BGP

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/

Acronyms (Cont)

EGP Exterial Gateway Protocol

ERP Exterior Router Protocol

□ FCAPS Fault Configuration Accounting Performance and Security

□ FRM Forwarding Rules Manager

□ GBP Group Based Policy

GUI Graphical User Interface

□ HTTP Hyper-Text Transfer Protocol

iBGP interior BGP

□ ICMP IP Control Message Protocol

■ ID Identifier

□ IDRP ICMP Router Discovery Protocol

□ IGP Interior Gateway Protocol

□ IGRP Interior Gateway Routing Protocol

□ IP Internet Protocol

□ IRP Interior Router Protocol

□ ISO International Standards Organization

Student Questions

http://www.cse.wustl.edu/~jain/cse473-22/

Acronyms (Cont)

■ LACP Link Aggregation Control Protocol

□ LSA Link State Advertisements

■ MIB Management Information Base

■ MTU Maximum Transmission Unit

NETCONF Network Configuration Protocol

■ NIC Network Interface Card

OSGi Open Service Gatway Initiative

OSI Open Service Interconnection

OSPFOpen Shortest Path First

OVSDB Open Vswitch Database

PCEP Path Computation Element Protocol

PCMM Packet Cable Multimedia

□ REST Representational State Transfer

□ RESTful Representational State Transfer

□ RFC Request for Comments

□ SAL Service Abstraction Layer

Student Questions

Acronyms (Cont)

SDN Software Defined Networking

□ SDNI SDN domains interface

SFC Service Function Chaining

SGMP Simple Gateway Management Protocol

□ SNBI Secure Network Bootstrapping Interface

□ SNMP Simple Network Management Protocol

□ SXP SGT (Security Group Tags) Exchange Protocol

□ TCP Transmission Control Protocol

□ ToS Type of Service

☐ TSDR Time Series Data Repository

TTL Time to Live

UDP User Datagram Protocol

■ USC Unified Secure Channel

■ VPN Virtual Private Network

□ VTN Virtual Tenant Network

Student Questions

Scan This to Download These Slides





Raj Jain http://rajjain.com

http://www.cse.wustl.edu/~jain/cse473-21/i_5nlc.htm

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

©2022 Raj Jain

Related Modules



CSE 567: The Art of Computer Systems Performance Analysis

https://www.youtube.com/playlist?list=PLjGG94etKypJEKjNAa1n_1X0bWWNyZcof

CSE473S: Introduction to Computer Networks (Fall 2011),

https://www.youtube.com/playlist?list=PLjGG94etKypJWOSPMh8Azcgy5e_10TiDw





CSE 570: Recent Advances in Networking (Spring 2013)

https://www.youtube.com/playlist?list=PLjGG94etKypLHyBN8mOgwJLHD2FFIMGq5

CSE571S: Network Security (Spring 2011),

 $\underline{https://www.youtube.com/playlist?list=PLjGG94etKypKvzfVtutHcPFJXumyyg93u}$





Video Podcasts of Prof. Raj Jain's Lectures,

https://www.youtube.com/channel/UCN4-5wzNP9-ruOzQMs-8NUw

Washington University in St. Louis

http://www.cse.wustl.edu/~jain/cse473-22/

©2022 Raj Jain