


# Data Center Ethernet



Raj Jain

Washington University in Saint Louis  
 Saint Louis, MO 63130  
 Jain@cse.wustl.edu

These slides and audio/video recordings of this class lecture are at:  
<http://www.cse.wustl.edu/~jain/cse570-18/>



1. Residential vs. Data Center Ethernet
2. Review of Ethernet Addresses, devices, speeds, algorithms
3. Enhancements to Spanning Tree Protocol
4. Virtual LANs
5. Data Center Bridging Extensions

## Quiz: True or False?

Which of the following statements are generally true?

T F

- Ethernet is a local area network (Local  $\leq$  2km)
- Token ring, Token Bus, and CSMA/CD are the three most common LAN access methods.
- Ethernet uses CSMA/CD.
- Ethernet bridges use spanning tree for packet forwarding.
- Ethernet frames are 1518 bytes.
- Ethernet does not provide any delay guarantees.
- Ethernet has no congestion control.
- Ethernet has strict priorities.

## Residential vs. Data Center Ethernet

Residential	Data Center
<input type="checkbox"/> Distance: up to 200m	<input type="checkbox"/> No limit
<input type="checkbox"/> Scale: <ul style="list-style-type: none"> <li>&gt; Few MAC addresses</li> <li>&gt; 4096 VLANs</li> </ul>	<input type="checkbox"/> Millions of MAC Addresses <input type="checkbox"/> Millions of VLANs Q-in-Q
<input type="checkbox"/> Protection: Spanning tree	<input type="checkbox"/> Rapid spanning tree, ... (Gives 1s, need 50ms)
<input type="checkbox"/> Path determined by spanning tree	<input type="checkbox"/> Traffic engineered path
<input type="checkbox"/> Simple service	<input type="checkbox"/> Service Level Agreement. Rate Control.
<input type="checkbox"/> Priority ⇒ Aggregate QoS	<input type="checkbox"/> Need per-flow/per-class QoS
<input type="checkbox"/> No performance/Error monitoring (OAM)	<input type="checkbox"/> Need performance/BER

## IEEE 802 Address Format

- 48-bit: 1000 0000 : 0000 0001 : 0100 0011  
: 0000 0000 : 1000 0000 : 0000 1100  
= 80:01:43:00:80:0C

Organizational Unique Identifier (OUI)		24 bits assigned by OUI Owner
Individual/Group	Universal/Local	
1	1	22
		24

- Multicast = “To all bridges on this LAN”
- Broadcast = “To all stations” (Note: Local bit is set)  
= 111111...111 = FF:FF:FF:FF:FF:FF

## IEEE Standards Numbering System

- IEEE 802.\* and IEEE 802.1\* standards (e.g., IEEE 802.1Q-2011) apply to all IEEE 802 technologies:
  - IEEE 802.3 Ethernet
  - IEEE 802.11 WiFi
  - IEEE 802.16 WiMAX

802 Overview and Architecture				
802.2 Logical Link Control				
802.1 Bridging				
802.1 Management				
802.10 Security				
802.3 Ethernet	...	802.11 WiFi	...	802.17 Resilient Packet Ring (RPR)

## IEEE Standards Numbering (Cont)

- IEEE 802.3\* standards apply only to Ethernet, e.g., IEEE802.3ba-2010
- Standards with all upper case letters are base standards E.g., IEEE 802.1AB-2009
- Standards with lower case are additions/extensions/revisions. Merged with the base standard in its next revision. e.g., IEEE 802.1w-2001 was merged with IEEE 802.1D-2004
- Standards used to be numbered, sequentially, e.g., IEEE 802.1a, ..., 802.1z, 802.1aa, 802.1ab, ...
- Recently they started showing base standards in the additions, e.g., IEEE 802.1Qau-2010

## Names, IDs, Locators





**Name:** John Smith

**ID:** 012-34-5678

**Locator:**  
1234 Main Street  
Big City, MO 12345  
USA

- Locator changes as you move, ID and Names remain the same.
- Examples:**
  - Names: Company names, DNS names (Microsoft.com)
  - IDs: Cell phone numbers, 800-numbers, Ethernet addresses, Skype ID, VOIP Phone number
  - Locators: Wired phone numbers, IP addresses

## Interconnection Devices

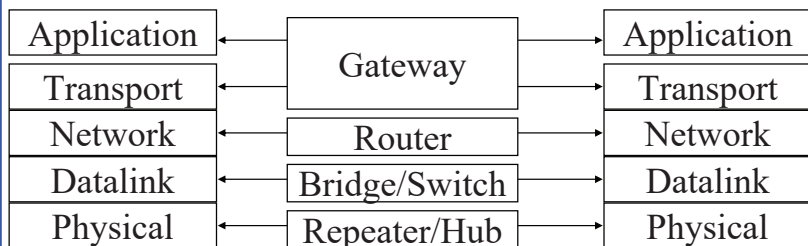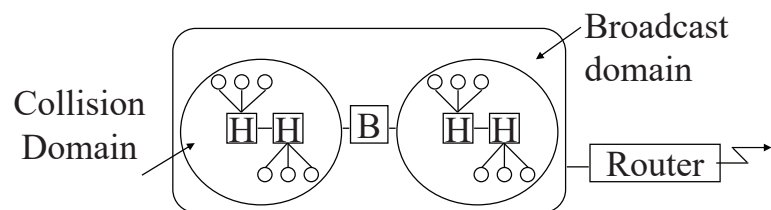


## Interconnection Devices (Cont)

- ❑ **Repeater:** PHY device that restores data and collision signals
- ❑ **Hub:** Multiport repeater + fault detection and recovery
- ❑ **Bridge:** Datalink layer device connecting two or more collision domains. MAC multicasts are propagated throughout the LAN.
- ❑ **Router:** Network layer device. IP, IPX, AppleTalk. Does not propagate MAC multicasts.
- ❑ **Switch:** Multiport bridge with parallel paths
- ❑ These are functions. Packaging varies.

## Ethernet Speeds

- ❑ IEEE 802.3ba-2010 (40G/100G) standard
- ❑ 10Mbps, 100 Mbps, 1 Gbps versions have both CSMA/CD and Full-duplex versions
- ❑ No CSMA/CD in 10G and up
- ❑ No CSMA/CD in practice now even at home or at 10 Mbps
- ❑ 1 Gbps in residential, enterprise offices
- ❑ 1 Gbps in Data centers, moving to 10 Gbps and 40 Gbps
- ❑ 100G in some carrier core networks  
100G is still more expensive than 10×10G
- ❑ Note: only decimal **bit** rates are used in networking  
No cheating like binary byte values used in storage  
1 Gbps =  $10^9$  b/s, Buy 256 GB Disk = 238.4 GB storage


## Link Aggregation Control Protocol (LACP)




- ❑ IEEE 802.1AX-2008/IEEE 802.3ad-2000
- ❑ Allows several parallel links to be combined as one link  
 $3 \times 1\text{Gbps} = 3\text{ Gbps}$
- ❑ Allows any speed links to be formed
- ❑ Allows fault tolerance  
⇒ Combined Link remains connected even if one of the member links fails
- ❑ Several proprietary extensions. E.g., aggregate links to two switches which act as one switch.

## Spanning Tree Algorithm

- ❑ Helps form a tree out of a mesh topology
- ❑ All bridges multicast to “All bridges”
  - My ID. 64-bit ID = 16-bit priority + 48-bit MAC address.
  - Root ID
  - My cost to root
- ❑ The bridges update their info using Dijkstra’s algorithm and rebroadcast
- ❑ Initially all bridges are roots but eventually converge to one root as they find out the lowest Bridge ID.
- ❑ On each LAN, the bridge with minimum cost to the root becomes the Designated bridge
- ❑ All ports of all non-designated bridges are blocked.



## Spanning Tree Example

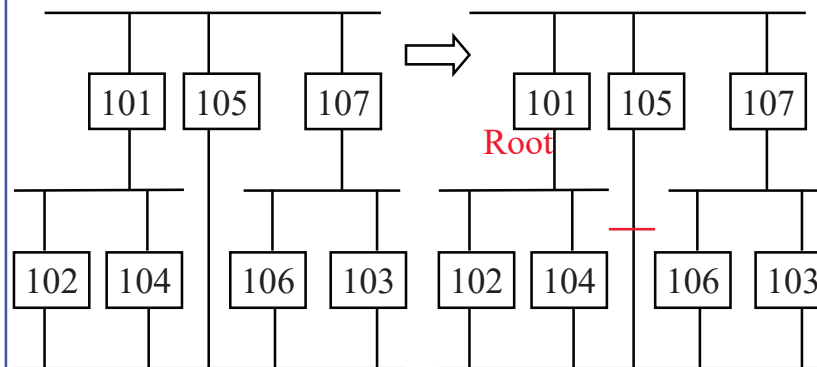


Ref: Cisco, “Understanding Spanning-Tree Protocol Topology Changes,”

[http://www.cisco.com/en/US/tech/tk389/tk621/technologies\\_tech\\_note09186a0080094797.shtml](http://www.cisco.com/en/US/tech/tk389/tk621/technologies_tech_note09186a0080094797.shtml)

## Homework 4


- ❑ Which links in the following diagram will be blocked by spanning tree? Justify your answer.



## Enhancements to STP

- ❑ A topology change can result in 1 minute of traffic loss with STP ⇒ All TCP connections break
- ❑ Rapid Spanning Tree Protocol (RSTP)  
IEEE 802.1w-2001 incorporated in IEEE 802.1D-2004
- ❑ One tree for all VLANs ⇒ Common spanning tree
- ❑ Many trees ⇒ Multiple spanning tree (MST) protocol  
IEEE 802.1s-2002 incorporated in IEEE 802.1Q-2005
- ❑ One or more VLANs per tree.

## MSTP (Multiple Spanning Tree)




- ❑ MSTP (Multiple STP)  
IEEE 802.1s-2002 incorporated in IEEE 802.1Q-2005
- ❑ Each tree serves a group of VLANs.
- ❑ A bridge port could be in forwarding state for some VLANs and blocked state for others.

## IS-IS Protocol


- ❑ Intermediate System to Intermediate System (IS-IS) is a protocol to build routing tables. Link-State routing protocol => Each nodes sends its connectivity (link state) information to all nodes in the network
- ❑ Dijkstra's algorithm is then used by each node to build its routing table.
- ❑ Similar to OSPF (Open Shortest Path First).
- ❑ OSPF is designed for IPv4 and then extended for IPv6. IS-IS is general enough to be used with any type of addresses
- ❑ OSPF is designed to run on the top of IP IS-IS is general enough to be used on any transport => Adopted by Ethernet

## Shortest Path Bridging

- ❑ IEEE 802.1aq-2012 (later incorporated in 802.1Q-2014)
- ❑ Allows all links to be used => Better CapEx
- ❑ IS-IS link state protocol (similar to OSPF) is used to build shortest path trees for each node to every other node within the SPB domain
- ❑ Equal-cost multi-path (ECMP) used to distribute load

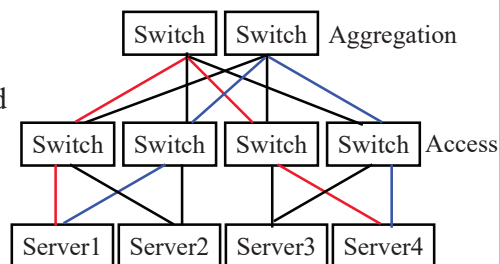


## What is a LAN?

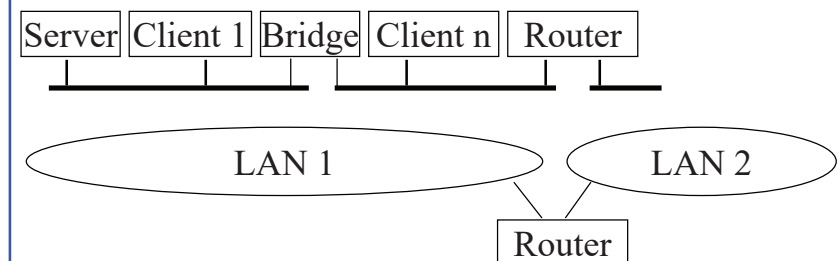


- ❑ LAN = Single broadcast domain = Subnet
- ❑ No routing between members of a LAN
- ❑ Routing required between LANs

## What is a Virtual LAN


### Physical View

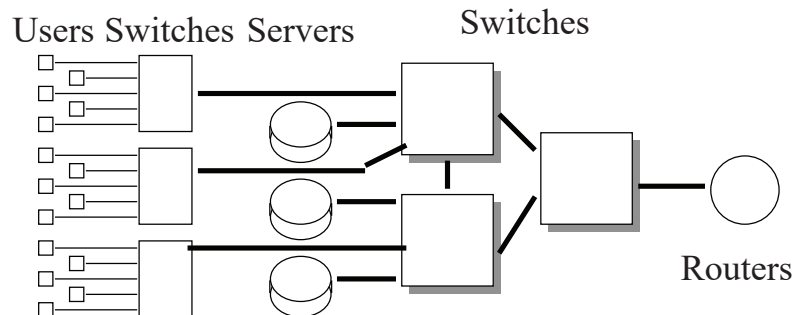

### Logical View

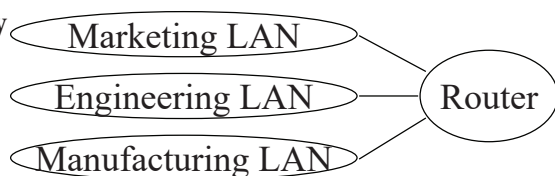

## Virtual LAN

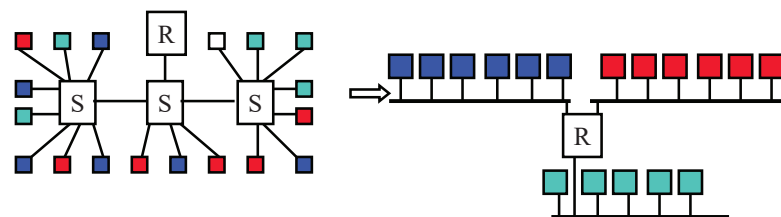

- Virtual LAN = Broadcasts and multicast goes only to the nodes in the virtual LAN
- LAN membership defined by the network manager ⇒ Virtual


## Types of Virtual LANs

- Layer-1 VLAN = Group of Physical ports
- Layer-2 VLAN = Group of MAC addresses
- Layer-3 VLAN = IP subnet

Switch Port	VLAN		VLAN1		VLAN2	
	1	2	VLAN1	VLAN2	VLAN1	VLAN2
A1	√		A1B234565600	21B234565600	23.45.6	
A2		√	D34578923434	634578923434		
A3	√		1345678903333	8345678903333	VLAN2	
B1		√	3438473450555	9438473450555		
B2	√		4387434304343	5387434304343	IPX	
			4780357056135	6780357056135		
			4153953470641	9153953470641		
			3473436374133	0473436374133		
			3403847333412	8403847333412		
			3483434343143	8483434343143		
			4343134134234	0343134134234		


## IEEE 802.1Q-2011 Tag

- Tag Protocol Identifier (TPI)
- Priority Code Point (PCP): 3 bits = 8 priorities 0..7 (High)
- Canonical Format Indicator (CFI): 0 ⇒ Standard Ethernet, 1 ⇒ IBM Token Ring format (non-canonical or non-standard)
- CFI now replaced by Drop Eligibility Indicator (DEI)
- VLAN Identifier (12 bits ⇒ 4095 VLANs)
- Switches forward based on MAC address + VLAN ID  
Unknown addresses are flooded.

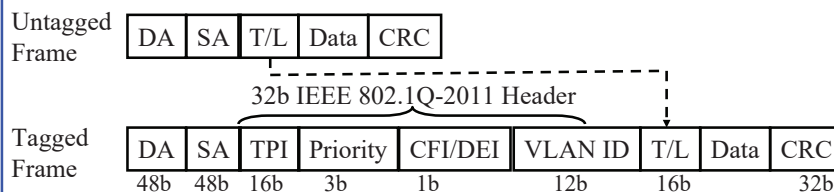

## Link Layer Discovery Protocol (LLDP)

- ❑ IEEE 802.1AB-2009
- ❑ Neighbor discovery by periodic advertisements
- ❑ Every minute a LLC frame is sent on every port to neighbors
- ❑ LLDP frame contains information in the form of Type-Length-Value (TLV)
- ❑ Types: My Chassis ID, My Port ID, Time-to-live, Port description (Manufacturer, product name, version), Administratively assigned system name, capabilities, MAC address, IP Address, Power-via-MDI, Link aggregation, maximum frame size, ...



Ref: M. Srinivasan, "Tutorial on LLDP," [http://www.eetimes.com/document.asp?doc\\_id=1272069](http://www.eetimes.com/document.asp?doc_id=1272069)  
 Ref: [http://en.wikipedia.org/wiki/Link\\_Layer\\_Discovery\\_Protocol](http://en.wikipedia.org/wiki/Link_Layer_Discovery_Protocol)  
 Washington University in St. Louis <http://www.cse.wustl.edu/~jain/cse570-18/>

4-25

©2018 Raj Jain

## Data Center Bridging


- ❑ Goal: To enable storage traffic over Ethernet
- ❑ Four Standards:
  - Priority-based Flow Control (IEEE 802.1Qbb-2011)
  - Enhanced Transmission Selection (IEEE 802.1Qaz-2011)
  - Congestion Control (IEEE 802.1Qau-2010)
  - Data Center Bridging Exchange (IEEE 802.1Qaz-2011)
- ❑ All of these are now incorporated in IEEE 802.1Q-2014

Ref: M. Hagen, "Data Center Bridging Tutorial," <http://www.iol.unh.edu/services/testing/dcb/training/DCB-Tutorial.pdf>  
 Washington University in St. Louis <http://www.cse.wustl.edu/~jain/cse570-18/>

4-26

©2018 Raj Jain

## Ethernet Flow Control: Pause Frame




- ❑ Defined in IEEE 802.3x-1997. A form of on-off flow control.
- ❑ A receiving switch can stop the adjoining sending switch by sending a "Pause" frame. Stops the sender from sending any further information for a time specified in the pause frame.
- ❑ The frame is addressed to a standard (well-known) multicast address. This address is acted upon but not forwarded.
- ❑ Stops all traffic. Causes congestion backup.

Ref: [http://en.wikipedia.org/wiki/Ethernet\\_flow\\_control](http://en.wikipedia.org/wiki/Ethernet_flow_control)  
 Washington University in St. Louis <http://www.cse.wustl.edu/~jain/cse570-18/>

4-27

©2018 Raj Jain

## Priority-based Flow Control (PFC)

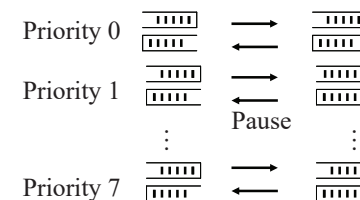

- ❑ IEEE 802.1Qbb-2011
- ❑ IEEE 802.1Qbb-2011 allows any single priority to be stopped. Others keep sending


Ref: J. L. White, "Technical Overview of Data Center Networks," SNIA, 2013, [http://www.snia.org/sites/default/education/tutorials/2012/fall/networking/JosephWhite\\_Technical%20Overview%20of%20Data%20Center%20Networks.pdf](http://www.snia.org/sites/default/education/tutorials/2012/fall/networking/JosephWhite_Technical%20Overview%20of%20Data%20Center%20Networks.pdf)  
 Washington University in St. Louis <http://www.cse.wustl.edu/~jain/cse570-18/>

4-28


©2018 Raj Jain

## Enhanced Transmission Selection

- IEEE 802.1Qaz-2011
- Goal: Guarantee bandwidth for applications sharing a link
- Traffic is divided in to 8 classes (not priorities)
- The classes are grouped.
- Standard requires min 3 groups: 1 with PFC (Storage with low loss), 1 W/O PFC (LAN), 1 Strict Priority (Inter-process communication and VOIP with low latency)

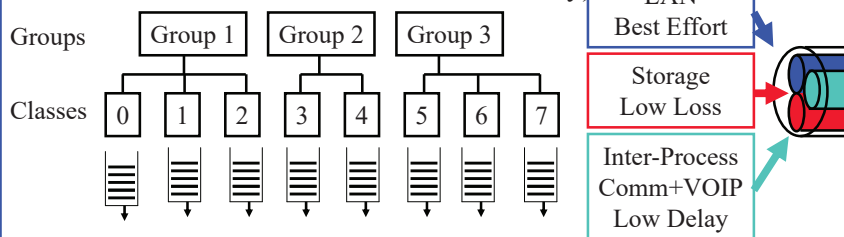

## ETS (Cont)

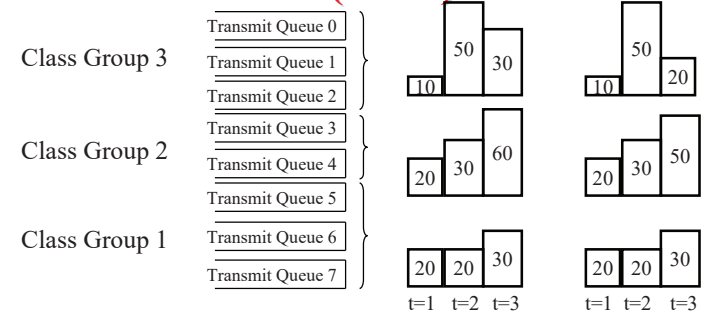

- Bandwidth allocated per class group in 1% increment but 10% precision ( $\pm 10\%$  error).
- Max 75% allocated  $\Rightarrow$  Min 25% best effort
- Fairness within a group
- All unused bandwidth is available to all classes wanting more bandwidth. Allocation algorithm **not** defined.
- Example: Group 1=20%, Group 2=30%

## A ETS Fairness Example

- Max-Min Fairness:** Giving more to any one should not require decreasing to someone with less allocation (Help the poorest first)
- Example:** In a 3-class group bridge, Groups 1 and 2 have a minimum guaranteed bandwidth of 20% and 30%, respectively. In a particular time slot, the traffic demands for group 1, 2, and 3 are 30%, 60%, 30%, respectively. How much should each group get?
- Iteration 1:** Group 1 = 20, Group 2 = 30, Unallocated = 50, Unsatisfied groups = 3, Fair allocation of unallocated bandwidth =  $50/3$  per group
- Iteration 2:** Group 1 =  $20 + 10$  (can't use more), Group 2 =  $30 + 50/3$ , Group 3 =  $50/3$ , Total Used =  $280/3$ , Unallocated =  $20/3$ , Unsatisfied groups = 2, Fair share of unallocated bandwidth =  $10/3$  per group
- Iteration 3:** Group 1 = 30, Group 2 =  $30 + 50/3 + 10/3$ , Group 3 =  $50/3 + 10/3$ , Total Used = 100, Unallocated = 0  $\Rightarrow$  Done.

## Tabular Method for Max-Min Fairness

Iteration		1	2	3	Total	Unused	# Unsatisfied
	Demand	30	60	30	120		
1	Guaranteed Allocation	20	30	0	50	50	
	Total Used	20	30	0	50	50	3
2	Additional Allocation	16.7	16.7	16.7			
	Total Used	30	46.7	16.7	93.3	6.7	2
3	Additional Allocation	0	3.3	3.3			
	Total Used	30	50	20	100	0	2


- Iterations end when either unused capacity or # of unsatisfied groups is zero.



## Homework 4B

- What would be max-min allocation for a 4 group system in which group 1 through 3 are guaranteed 10%, 20%, and 30% respectively. The demands on a 100 Gbps system are 1 Gbps, 4Gbps, and 35 Gbps, and 70 Gbps.

## Quantized Congestion Notification (QCN)



- IEEE 802.1Qau-2010 Dynamic Congestion Notification
- A source quench message is sent by the congested switch direct to the source. The source reduces its rate for that flow.
- Sources need to keep per-flow states and control mechanisms
- Easy for switch manufacturers but complex for hosts. Implemented in switches but not in hosts  $\Rightarrow$  Not effective.
- The source may be a router in a subnet and not the real source  $\Rightarrow$  Router will drop the traffic. QCN does not help in this case.

## DCBX

- Data Center Bridging eXchange, IEEE 802.1Qaz-2011
- Uses LLDP to negotiate quality metrics and capabilities for Priority-based Flow Control, Enhanced Transmission Selection, and Quantized Congestion Notification
- New TLV's
  - Priority group definition
  - Group bandwidth allocation
  - PFC enablement per priority
  - QCN enablement
  - DCB protocol profiles
  - FCoE and iSCSI profiles

## Summary



- Ethernet's use of IDs as addresses makes it very easy to move systems in the data center  $\Rightarrow$  Keep traffic on the same Ethernet
- Spanning tree is wasteful of resources and slow. Ethernet now uses shortest path bridging (similar to OSPF)
- VLANs allow different non-trusting entities to share an Ethernet network
- Data center bridging extensions reduce the packet loss by enhanced transmission selection and Priority-based flow control

## List of Acronyms

- ❑ BER Bit Error Rate
- ❑ BPDU Bridge Protocol Data Unit
- ❑ CD Collision Detection
- ❑ CFI Canonical Format Indicator
- ❑ CRC Cyclic Redundancy Check
- ❑ CSMA Carrier Sense Multiple Access with Collision Detection
- ❑ DA Destination Address
- ❑ DCB Data Center Bridging
- ❑ DCBX Data Center Bridging eXtension
- ❑ DEI Drop Eligibility Indicator
- ❑ DNS Domain Name System
- ❑ ECMP Equal-cost multi-path
- ❑ ETS Enhanced Transmission Selection
- ❑ GB Giga Byte

## List of Acronyms (Cont)

- ❑ ID Identifier
- ❑ IP Internet Protocol
- ❑ IEEE Institution of Electrical and Electronics Engineers
- ❑ IS-IS Intermediate System to Intermediate System
- ❑ iSCSI Internet Small Computer System Interface
- ❑ LACP Link Aggregation Control Protocol
- ❑ LAN Local Area Network
- ❑ LLC Logical Link Control
- ❑ LLDP Link Layer Discovery Protocol
- ❑ MAC Media Access Control
- ❑ MDI Medium Dependent Interface
- ❑ MSB Most significant byte first
- ❑ MST Multiple Spanning Tree
- ❑ MSTP Multiple Spanning Tree Protocol
- ❑ OAM Operations, Administration, and Management

## List of Acronyms (Cont)

- ❑ OSPF Open Shortest Path First
- ❑ OUI Organizationally Unique Identifier
- ❑ PCP Priority Code Point
- ❑ PFC Priority-based Flow Control
- ❑ PHY Physical layer
- ❑ QCN Quantized Congestion Notification
- ❑ QoS Quality of Service
- ❑ RSTP Rapid Spanning Tree Protocol
- ❑ SA Source Address
- ❑ SNIA Storage Networking Industries Association
- ❑ SPB Shortest Path Bridging
- ❑ STP Spanning Tree Protocol
- ❑ TCP Transmission Control Protocol
- ❑ TLV Type-Length-Value
- ❑ TPI Tag Protocol Identifier
- ❑ VLAN Virtual Local Area Network
- ❑ VM Virtual machine

## List of Acronyms (Cont)

- ❑ VOIP Voice over IP
- ❑ WAN Wide Area Network
- ❑ WiFi Wireless Fidelity
- ❑ WiMAX Wireless Interoperability for Microwave Access

## Reading List

- ❑ G. Santana, “Data Center Virtualization Fundamentals,” Cisco Press, 2014, ISBN:1587143240
- ❑ Enterasys, “Enterasys Design Center Networking - Connectivity and Topology Design Guide,” 2013, <http://www.enterasys.com/company/literature/datacenter-design-guide-wp.pdf>
- ❑ Cisco, “Understanding Spanning-Tree Protocol Topology Changes,” [http://www.cisco.com/en/US/tech/tk389/tk621/technologies\\_tech\\_note09186a0080094797.shtml](http://www.cisco.com/en/US/tech/tk389/tk621/technologies_tech_note09186a0080094797.shtml)
- ❑ Cisco, Understanding Rapid Spanning Tree Protocol (802.1w), [http://www.cisco.com/en/US/tech/tk389/tk621/technologies\\_white\\_paper09186a0080094cfa.shtml](http://www.cisco.com/en/US/tech/tk389/tk621/technologies_white_paper09186a0080094cfa.shtml)
- ❑ Canonical vs. MSB Addresses, <http://support.lexmark.com/index?page=3Dcontent&id=3DHO1299>

## Reading List (Cont)

- ❑ M. Hagen, “Data Center Bridging Tutorial,” <http://www.iol.unh.edu/services/testing/dcb/training/DCB-Tutorial.pdf>
- ❑ J. L. White, “Technical Overview of Data Center Networks,” SNIA, 2013, [http://www.snia.org/sites/default/education/tutorials/2012/fall/networking/JosephWhite\\_Technical%20Overview%20of%20Data%20Center%20Networking.pdf](http://www.snia.org/sites/default/education/tutorials/2012/fall/networking/JosephWhite_Technical%20Overview%20of%20Data%20Center%20Networking.pdf)
- ❑ I. Pepelnjak, “DCB Congestion Notification (802.1Qau),” <http://blog.ipspace.net/2010/11/data-center-bridging-dcb-congestion.html>

## Wikipedia Links

- ❑ [http://en.wikipedia.org/wiki/10-gigabit\\_Ethernet](http://en.wikipedia.org/wiki/10-gigabit_Ethernet)
- ❑ [http://en.wikipedia.org/wiki/100\\_Gigabit\\_Ethernet](http://en.wikipedia.org/wiki/100_Gigabit_Ethernet)
- ❑ [http://en.wikipedia.org/wiki/Data\\_center](http://en.wikipedia.org/wiki/Data_center)
- ❑ [http://en.wikipedia.org/wiki/Data\\_center\\_bridging](http://en.wikipedia.org/wiki/Data_center_bridging)
- ❑ [http://en.wikipedia.org/wiki/Data\\_link\\_layer](http://en.wikipedia.org/wiki/Data_link_layer)
- ❑ <http://en.wikipedia.org/wiki/EtherChannel>
- ❑ <http://en.wikipedia.org/wiki/Ethernet>
- ❑ [http://en.wikipedia.org/wiki/Ethernet\\_flow\\_control](http://en.wikipedia.org/wiki/Ethernet_flow_control)
- ❑ [http://en.wikipedia.org/wiki/Ethernet\\_frame](http://en.wikipedia.org/wiki/Ethernet_frame)
- ❑ [http://en.wikipedia.org/wiki/Ethernet\\_physical\\_layer](http://en.wikipedia.org/wiki/Ethernet_physical_layer)
- ❑ <http://en.wikipedia.org/wiki/EtherType>
- ❑ [http://en.wikipedia.org/wiki/Fast\\_Ethernet](http://en.wikipedia.org/wiki/Fast_Ethernet)
- ❑ [http://en.wikipedia.org/wiki/Gigabit\\_Ethernet](http://en.wikipedia.org/wiki/Gigabit_Ethernet)


## Wikipedia Links (Cont)

- ❑ [http://en.wikipedia.org/wiki/IEEE\\_802.1aq](http://en.wikipedia.org/wiki/IEEE_802.1aq)
- ❑ [http://en.wikipedia.org/wiki/IEEE\\_802.1D](http://en.wikipedia.org/wiki/IEEE_802.1D)
- ❑ [http://en.wikipedia.org/wiki/IEEE\\_802.1Q](http://en.wikipedia.org/wiki/IEEE_802.1Q)
- ❑ [http://en.wikipedia.org/wiki/IEEE\\_802.3](http://en.wikipedia.org/wiki/IEEE_802.3)
- ❑ [http://en.wikipedia.org/wiki/IEEE\\_P802.1p](http://en.wikipedia.org/wiki/IEEE_P802.1p)
- ❑ <http://en.wikipedia.org/wiki/IS-IS>
- ❑ [http://en.wikipedia.org/wiki/Link\\_Aggregation](http://en.wikipedia.org/wiki/Link_Aggregation)
- ❑ [http://en.wikipedia.org/wiki/Link\\_Aggregation\\_Control\\_Protocol](http://en.wikipedia.org/wiki/Link_Aggregation_Control_Protocol)
- ❑ [http://en.wikipedia.org/wiki/Link\\_layer](http://en.wikipedia.org/wiki/Link_layer)
- ❑ [http://en.wikipedia.org/wiki/Link\\_Layer\\_Discovery\\_Protocol](http://en.wikipedia.org/wiki/Link_Layer_Discovery_Protocol)
- ❑ [http://en.wikipedia.org/wiki/Logical\\_link\\_control](http://en.wikipedia.org/wiki/Logical_link_control)
- ❑ [http://en.wikipedia.org/wiki/MAC\\_address](http://en.wikipedia.org/wiki/MAC_address)
- ❑ <http://en.wikipedia.org/wiki/MC-LAG>

## Wikipedia Links (Cont)

- [http://en.wikipedia.org/wiki/Media\\_Independent\\_Interface](http://en.wikipedia.org/wiki/Media_Independent_Interface)
- [http://en.wikipedia.org/wiki/Minimum\\_spanning\\_tree](http://en.wikipedia.org/wiki/Minimum_spanning_tree)
- [http://en.wikipedia.org/wiki/Network\\_switch](http://en.wikipedia.org/wiki/Network_switch)
- [http://en.wikipedia.org/wiki/Organizationally\\_unique\\_identifier](http://en.wikipedia.org/wiki/Organizationally_unique_identifier)
- [http://en.wikipedia.org/wiki/Port\\_Aggregation\\_Protocol](http://en.wikipedia.org/wiki/Port_Aggregation_Protocol)
- [http://en.wikipedia.org/wiki/Priority-based\\_flow\\_control](http://en.wikipedia.org/wiki/Priority-based_flow_control)
- <http://en.wikipedia.org/wiki/RSTP>
- [http://en.wikipedia.org/wiki/Shortest\\_Path\\_Bridging](http://en.wikipedia.org/wiki/Shortest_Path_Bridging)
- [http://en.wikipedia.org/wiki/Spanning\\_tree](http://en.wikipedia.org/wiki/Spanning_tree)
- [http://en.wikipedia.org/wiki/Spanning\\_Tree\\_Protocol](http://en.wikipedia.org/wiki/Spanning_Tree_Protocol)
- [http://en.wikipedia.org/wiki/Subnetwork\\_Access\\_Protocol](http://en.wikipedia.org/wiki/Subnetwork_Access_Protocol)
- [http://en.wikipedia.org/wiki/Virtual\\_LAN](http://en.wikipedia.org/wiki/Virtual_LAN)

## Scan This to Download These Slides

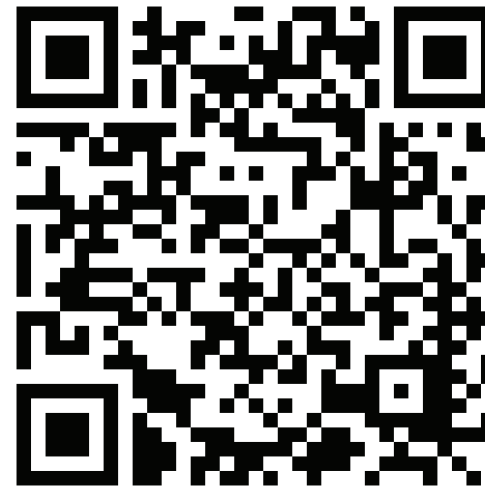

Raj Jain

<http://rajjain.com>

## Related Modules



CSE567M: Computer Systems Analysis (Spring 2013),

[https://www.youtube.com/playlist?list=PLjGG94etKypJEKjNAa1n\\_1X0bWWNyZcof](https://www.youtube.com/playlist?list=PLjGG94etKypJEKjNAa1n_1X0bWWNyZcof)



CSE473S: Introduction to Computer Networks (Fall 2011),

[https://www.youtube.com/playlist?list=PLjGG94etKypJWOSPMh8Azcg5e\\_10TiDw](https://www.youtube.com/playlist?list=PLjGG94etKypJWOSPMh8Azcg5e_10TiDw)



Wireless and Mobile Networking (Spring 2016),

[https://www.youtube.com/playlist?list=PLjGG94etKypKeb0nzyN9tSs\\_HCd5c4wXF](https://www.youtube.com/playlist?list=PLjGG94etKypKeb0nzyN9tSs_HCd5c4wXF)



CSE571S: Network Security (Fall 2011),

<https://www.youtube.com/playlist?list=PLjGG94etKypKvzfVtutHcPFJXumyyg93u>



Video Podcasts of Prof. Raj Jain's Lectures,

<https://www.youtube.com/channel/UCN4-5wzNP9-ruOzQMs-8NUw>